Contents

Introduction 2
Inspection 2
Warnings 2
Motor 2
Electrical 2
Grounding Instructions 2
Safety Instructions 3
Preventative Maintenance 4
Troubleshooting 4
Warranty 5

Backpack Vacuums 6
Quick Start 6
How To Wear/Ergonomics 7
Proper Vacuuming Motion for Large Areas 8
Filter Maintenance 9
Super CoachVac®/CoachVac™ Assembly 10
Super CoachVac®/CoachVac™ Parts List 11
MegaVac™ Assembly 12
MegaVac™ Parts List 13
LineVacer® Assembly 14
LineVacer® Parts List 15
Super QuarterVac™ Assembly 16
Super QuarterVac™ Parts List 17
QuarterVac® Assembly 18
QuarterVac® Parts List 19
QuietPro® BP Assembly 20
QuietPro® BP Parts List 21

Hip Style Vacuums 22
Quick Start 22
How To Wear/Ergonomics 23
Proper Vacuuming Motion for Large Areas 24
Filter Maintenance 25
TailVac® Assembly 26
TailVac® Parts List 27

Canister Vacuums 28
Quick Start 28
How To Wear/Ergonomics 29
Filter Maintenance 30
ProClean® Assembly 32
ProClean® Parts List 33
QuietPro® CN HEPA Assembly 34
QuietPro® CN HEPA Parts List 35
Spanish Translation 37
List of Sales Representatives 72

ENGLISH

ENGLISH

Introduction

INSPECTION

Carefully unpack and inspect your new ProTeam vacuum for shipping damage. If your vacuum is damaged, contact ProTeam immediately at 1.800.541.1456. You must obtain a Return Authorization Number (RAN) to return your vacuum.

WARNINGS

(Failure to comply with the following warnings may result in personal injury or property damage)

• **DO NOT** vacuum if the cord is frayed, worn, or damaged.

• **DO NOT** vacuum liquids or expose the vacuum to rain or water.

• **DO NOT** vacuum hazardous or toxic materials unless the unit is equipped with the proper filtration media and used by a trained professional.

• **DO NOT** vacuum flammable or combustible materials, and do not store them in the filter bay.

MOTOR

WARNING: Death, personal injury, or property damage can occur when electrical conductors are exposed to liquids, dry chemicals, or other foreign substances.

Follow these guidelines to prolong the life of your ProTeam vacuum:

• Never use the vacuum in wet or moist conditions.

• Never use the vacuum near dry chemicals or other volatile materials.

• Never allow the airflow on the vacuum to become blocked.

ELECTRICAL

CAUTION: Severe changes in voltage can permanently damage the motor.

All backpack vacuums are available in 120 volt and 220 volt.

All 120 volt vacuums use a standard 120 volt outlet.

GROUNDING INSTRUCTIONS

WARNING: Do not modify the vacuum plug. If the plug will not fit the outlet, ask a qualified electrician to install a grounded outlet. Failure to do so can result in personal injury.

ProTeam vacuums are equipped with a grounding conductor and grounding plug. Insert the plug into an outlet that is grounded in accordance with local codes and ordinances. Cutting off the ground wire or modifying the plug voids the warranty on the vacuum. ProTeam accepts no liability for improperly modified vacuums.

Safety Instructions

WARNING

Failure to comply with the following can result in personal injury or fire:

1. **DO NOT** leave any ProTeam vacuum plugged in when not in use. Unplug unit from the outlet before servicing.
2. **DO NOT** use the vacuum outdoors or on wet surfaces.
3. **DO NOT** vacuum any liquids.
4. Follow the directions in this manual, and only use recommended attachments and replacement parts.
5. To prevent electrical damage, use the recommended 50-foot/14 or 16-gauge extension cord provided.

   NOTE: If you need to use a 100-foot cord, it must be 14-gauge or better. **DO NOT** use cords longer than 100 feet.
6. **DO NOT** use the vacuum if the cord or plug is damaged. NOTE: Return the vacuum to an authorized ProTeam Warranty Station if the vacuum has been left outdoors or exposed to water. Call 1.800.541.1456 to locate the nearest ProTeam Warranty Station.
7. **Never** stretch the cord tightly between the vacuum and the outlet. After vacuuming, unplug the extension cord at both ends and wind it up loosely. **DO NOT** wind the cord up by wrapping it around your hand and elbow.
8. Protect the cord to avoid personal injury or damage to the vacuum. For example, never use the cord to pull or carry the vacuum. **DO NOT** close the cord in a door or pull the cord around sharp edges. Keep the cord away from heated surfaces.
9. **DO NOT** pull on the cord to unplug. Grasp the plug at the outlet and pull.
10. **DO NOT** handle the plug or vacuum with wet hands.
11. **DO NOT** put any objects into openings. Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts. Long hair should not hang over or near the unit.
12. **DO NOT** vacuum flammable or combustible materials or anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
13. Empty the Intercept Micro™ Filter after every use and before storage. Some types of wood dust and debris may become combustible.
14. Turn off the unit before unplugging.
15. Connect to a properly grounded outlet only.
16. Use with care when cleaning stairs.
17. **DO NOT** allow the vacuum to be used as a toy. Be careful when using the vacuum near children.

SAVE THESE INSTRUCTIONS

Violation of any of these instructions may void any and all warranties.

Preventative Maintenance

WARNING:

The following information is for use by qualified service personnel only and provides guidance for troubleshooting and maintenance.

- **Unplug** the vacuum when working on the motor or any electrical part.
- Have a qualified service person at an authorized ProTeam Warranty Station check the carbon brushes on the motor every six months and replace any brush worn down to 1/2" in length. If carbon brushes are not checked and replaced to maintenance schedule listed on pg. 5, warranty will be void.
- **Do not** lubricate the motor.
- **Do not** tie extension cord and power cord together. Doing so will result in damage to both cords and will not be covered under warranty.

CARING FOR YOUR VACUUM

1. To ensure a valid vacuum warranty, optimal performance and improved indoor air quality, be sure to use genuine ProTeam Intercept Micro Filters.
2. Check the filters before each use. Empty or replace the filters as necessary.
3. Rinse, air dry, and reinsert the foam/filter diffuser each week.
4. Wipe the inside and outside of the vacuum with a household cleaning agent after each use.

PROPER STORAGE

Store the vacuum in a dry place when not in use.

TROUBLESHOOTING

1. If the vacuum will not operate, check the following:
   a. The power supply cord at the wall outlet
   b. The power supply cord at the vacuum
   c. That the switch is in the "on" position and functioning properly
2. If the pigtail (18" power cord) is getting warm, check to see that the extension cord does not exceed a length of 50 feet at 16 gauge or 100 feet at 14 gauge. Longer cords will overheat and damage the vacuum.
3. If the exhaust that comes out of the bottom of the vacuum is warmer than usual, check and clean all four filters.
4. If the power switch fails, check the circuit breaker. If that is not the problem, call a ProTeam Warranty Station.
5. If loss of suction occurs, check the following:
   a. Check that debris is not plugging the hose, wand, and/or floor tool.
   b. Check and/or clean both Intercept Micro Filter and Cloth Filters.
   c. Check that the hose cuffs are fitting tightly on the hose and are not cracked.
   d. Check that the cap is properly attached to the vacuum body.
   e. Check that the Dome filter hasn't shifted and is securely in place.

Limited Warranty

ProTeam, Inc. warrants all commercial backpack and canister vacuum cleaners to be free from defects in materials and workmanship arising under normal usage and care for the following terms:

The warranty period is for three (3) years or 1400 total hours of operation (whichever comes first) on all parts, labor and motors and Lifetime on all molded body parts.

This warranty applies from the date of purchase only when the vacuum cleaner is used in accordance with ProTeam's operating instructions.

This warranty does not apply to:

Normal wear and tear including, but not limited to: hoses, filters, switches, carbon motor brushes and attachments.

Ordinary wear and tear and blockages which occur during use.

Damage due to unauthorized or improper use, modification, alteration, service or repair.

Motor warranty will be void on 1221W motors if used with 1.25" tools.

All vacuum motors are guaranteed for their respective time frames only if the following **carbon brush maintenance schedule** is completed and proof of maintenance provided:

1. Carbon brushes on the vacuum motor replaced after the first **800 hours** of operation by a ProTeam authorized service or warranty center.

2. Carbon brushes replaced again after the next **400 hours** of operation by a ProTeam authorized service or warranty center.

3. Carbon brushes replaced again after the next **200 hours** of operation by a ProTeam authorized service or warranty center.

If the above schedule is not followed, the vacuum motor armature will wear out prematurely and will void the warranty coverage.

This warranty is extended only to the original purchaser of the vacuum cleaner. If the vacuum cleaner is found to be defective during the warranty period, it will be ProTeam's option to replace or repair it, without charge, if returned in accordance with the following instructions:

The vacuum cleaner should be cleaned and packed carefully in a well paded carton and returned, shipping charges prepaid, or taken to any authorized ProTeam Warranty Station (Contact ProTeam's customer service department at 866.888.2168 for authorized warranty locations). ProTeam will not be responsible for repairs to products due to improper packing.

A Return Authorization Number (RAN) must be issued prior to receiving returned equipment. Contact ProTeam's customer service department at 866.888.2168 to request a RAN that is required for all warranty correspondence.

If a completed warranty card has not been returned to ProTeam, a dated, written proof-of-purchase must be enclosed with a statement advising the nature of the malfunction and a Return Authorization Number.

Any repair or replacement under this warranty shall not extend the warranty period.

THE FOREGOING WRITTEN WARRANTY SHALL CONSTITUTE THE EXCLUSIVE LIABILITY OF PROTEAM.

The above warranty is exclusive and in lieu of all other expressed warranties whether oral or written. Under no circumstances, whether alleged as a result of breach of contract or warranty, negligence or otherwise, shall ProTeam be liable to the purchaser or gift recipient or any other person for special incidental or consequential damages or nature, including, without limitation, damages to or loss of use of property. ProTeam's liability under any circumstances will not exceed the purchase price of the vacuum cleaner. No agent, employee, or representative of ProTeam, nor any other person, is authorized to modify this warranty in any respect.

ProTeam, QuarterVac, Super CoachVac, LineVacer, TailVac, ProClean, and Filter Guard are trademarks of ProTeam, Inc. in the USA. Velcro is a registered trademark of Velcro Company in the USA.

Figure A

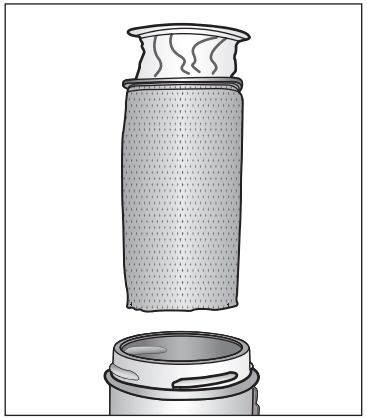

Figure B

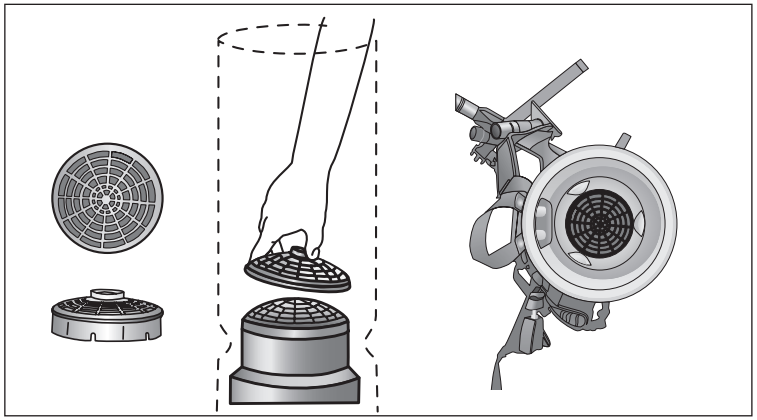

Figure C

Figure D

Figure E

Backpack Vacuums

OVERVIEW

- Vacuum (1)
- Powercord (2)
- Hose (3)
- Accessories (4)
- Intercept Micro Filter (5)
- Micro Cloth Filter (6)
- Dome Filter (7)
- Exhaust Filter (8)

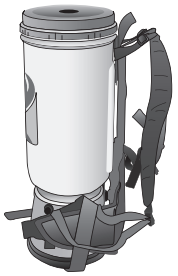

(1)

(2)



(3)

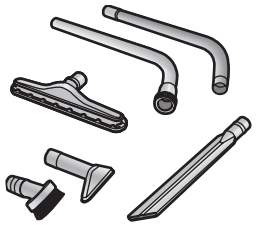

(4)

(5)



(6)

(7)

(8)

GETTING STARTED

1. Unscrew the cap on the top of the vacuum unit (Figure A).
2. Remove filters (Figure B).
3. Check to make sure the Dome Filter did not shift during shipping (Figure C).
4. Replace the Intercept Micro Filter and the Micro Cloth Filter into the vacuum (Figure B).
5. Replace the cap (Figure D).
6. Push the hose into the cap opening (Figure E).

WEARING THE BACKPACK VACUUM

9. Loosen the shoulder straps and the waist belt. Lift the vacuum and slide your arms through the straps (Figure F).
10. Connect the waist strap (Figure G).
11. Tighten the waist belt. It is very important that the weight of the unit be concentrated on your hips rather than your shoulders (Figure H).
10. Adjust the shoulder straps so that the unit fits comfortably, but the weight is still concentrated on your hips (Figure I).
13. Connect the sternum strap (Figure J).
14. Slide the buckle up or down the strap for best fit (Figure K).

BACKPACK ERGONOMICS

- The weight of the vacuum should be evenly distributed on your hips.
- Adjust the padded waist belt and shoulder straps for a custom fit.
- The backpacks have a ventilated backplate to keep the operator cool.
- The on/off switch is conveniently located on the waist belt of the backpack vacuums.
- Use the proper attachments for the job. ProTeam has attachments to perform most jobs without requiring you to bend over or get into difficult positions.

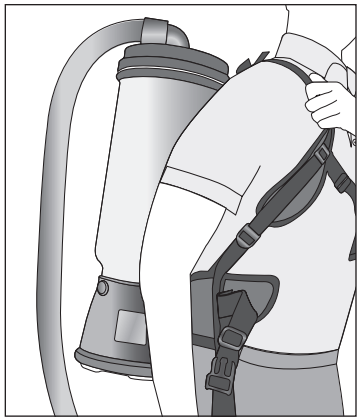

Figure F

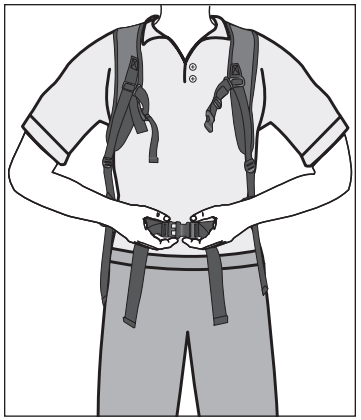

Figure G

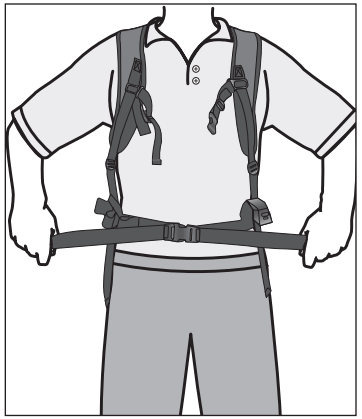

Figure H

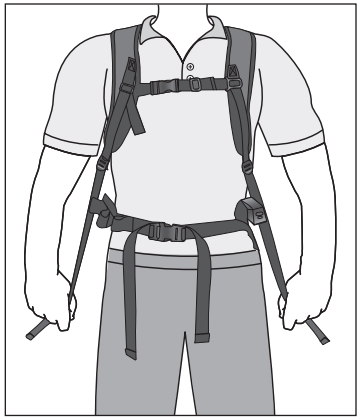

Figure I

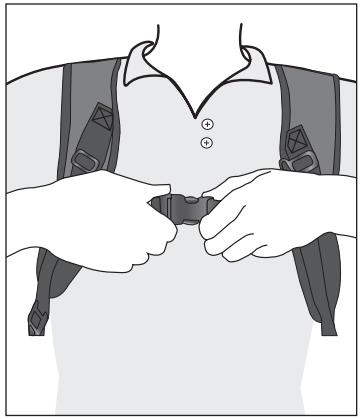

Figure J

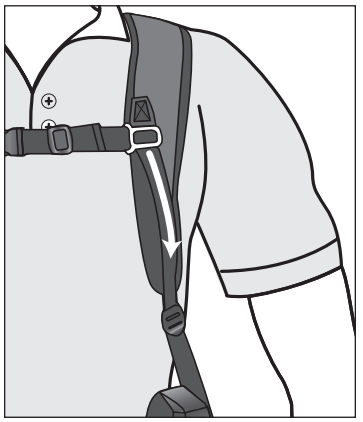

Figure K

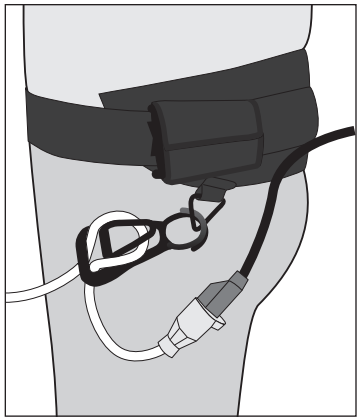

Figure L

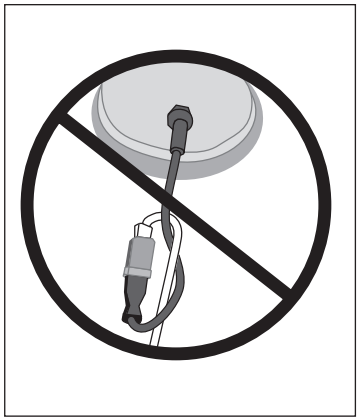

Figure M

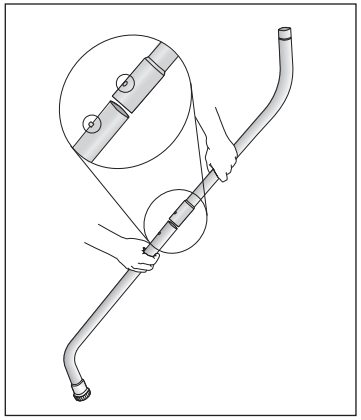

Figure N

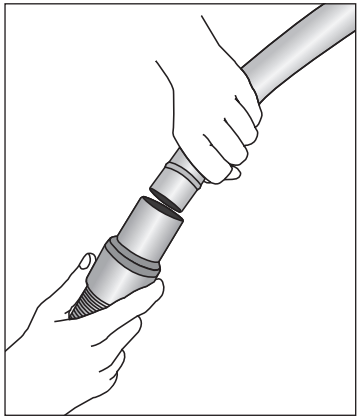

Figure O

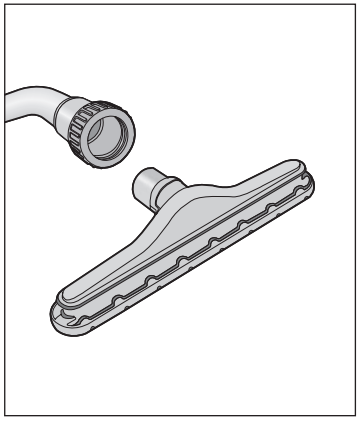

Figure P

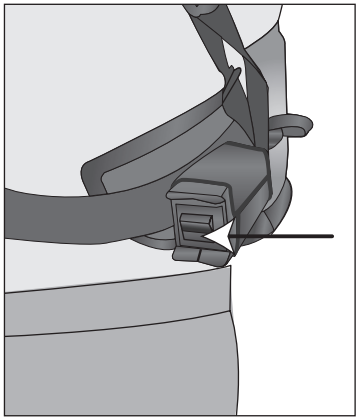

Figure Q

OPERATING THE BACKPACK VACUUM

15. Thread the extension cord through the Cord-O-Holder on the waistbelt (Figure L).
16. Do not tie extension cord and power cord together. Doing so will result in damage to both cords and will not be covered under warranty (Figure M).
17. Fasten the ends of the wands together, snapping them into place (Figure N).
18. Twist the wand onto the end of the hose (Figure O).
19. Attach the floor tool to end of wand. Align the brass ring with the indentation on the floor tool to ensure a secure fit (Figure P).
20. Plug the power cord into the wall. Turn the unit on, and proceed with vacuuming.
21. The on/off switch is conveniently located on the waist belt of the backpack vacuums (Figure Q).
22. The QuietPro BP has a different power switch. Use the power switch to choose one of the following power modes.
    - POWER MODE (HI) mode provides better performance.
    - QUIET MODE (LO) mode provides quieter operation.

PROPER VACUUMING MOTION FOR LARGE AREAS

1. Begin with the wand parallel to your body.
2. Draw the top of the wand in toward your waist and twist at the waist walking backward or forward, in a side-to-side motion (Figure R). The motion is similar to mopping and keeps the upper body and arms from tiring.

Figure R

Filter Maintenance

1. Empty and inspect the filters every time you start and finish vacuuming (Figure S). Replace if necessary. A clogged and dirty filter restricts airflow and results in reduced suction and overheating.
2. To replace the Intercept Micro Filter, slide filter into the Cloth Filter and secure into vacuum (Figure T).
3. Once a month, or as necessary, hand or machine wash the Cloth Filter and let it line dry, do not put it in the dryer (Figure U).
4. Once a week, or as necessary, clean the Dome Filter.
   a. First, remove the Intercept Micro Filter and Cloth Filter. Reach into the vacuum body and twist the Dome Filter from the motor (Figure V).
   b. Pull the top piece of the Dome Filter off and remove the foam media (Figure W). Shake it out, rinse it and let it air dry thoroughly
   c. Firmly snap the top piece of the Dome Filter into place (Figure V).

   NOTE: If using a high filtration disc in place of the foam media, check it every two to three weeks. When the disc becomes discolored, replace it with a new disc. The life of the high filtration disc will depend greatly on the use and care of the Intercept Micro Filter and Cloth Filter.
5. For backpack models (with exposed exhaust filter), rinse, air dry, and return the foam filter/diffuser at the bottom of the vacuum below the motor (Figure X).
6. Following the above instructions is the best way to prolong the life of the vacuum. **DO NOT TRY TO WASH** or **VACUUM** the LineVacer HEPA, ULPA or QuietPro BP Exhaust Filters. Doing so will fracture the filter media, greatly decreasing its efficiency. HEPA and ULPA filters CAN be shaken out gently **EXCEPT** when hazardous materials, which must remain sealed, have been vacuumed.

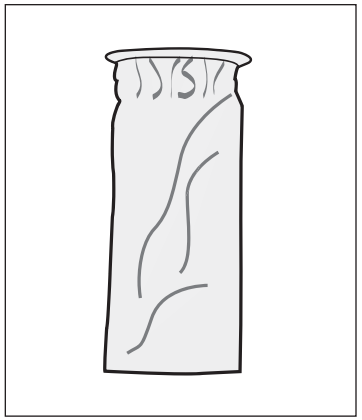

Figure S

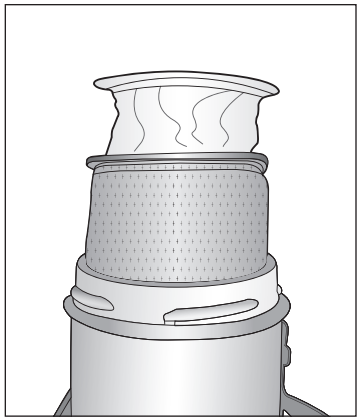

Figure T

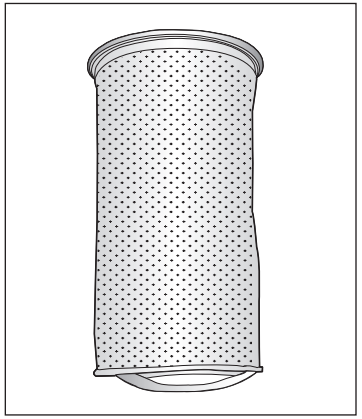

Figure U

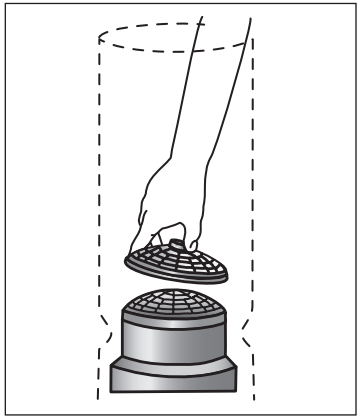

Figure V

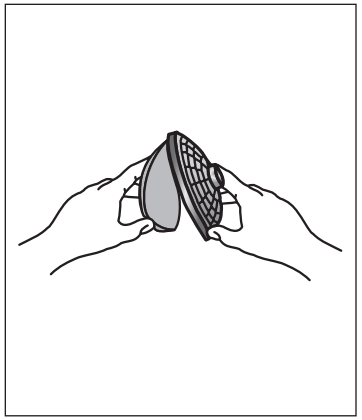

Figure W

Figure X

ENGLISH

Super CoachVac/CoachVac Assembly

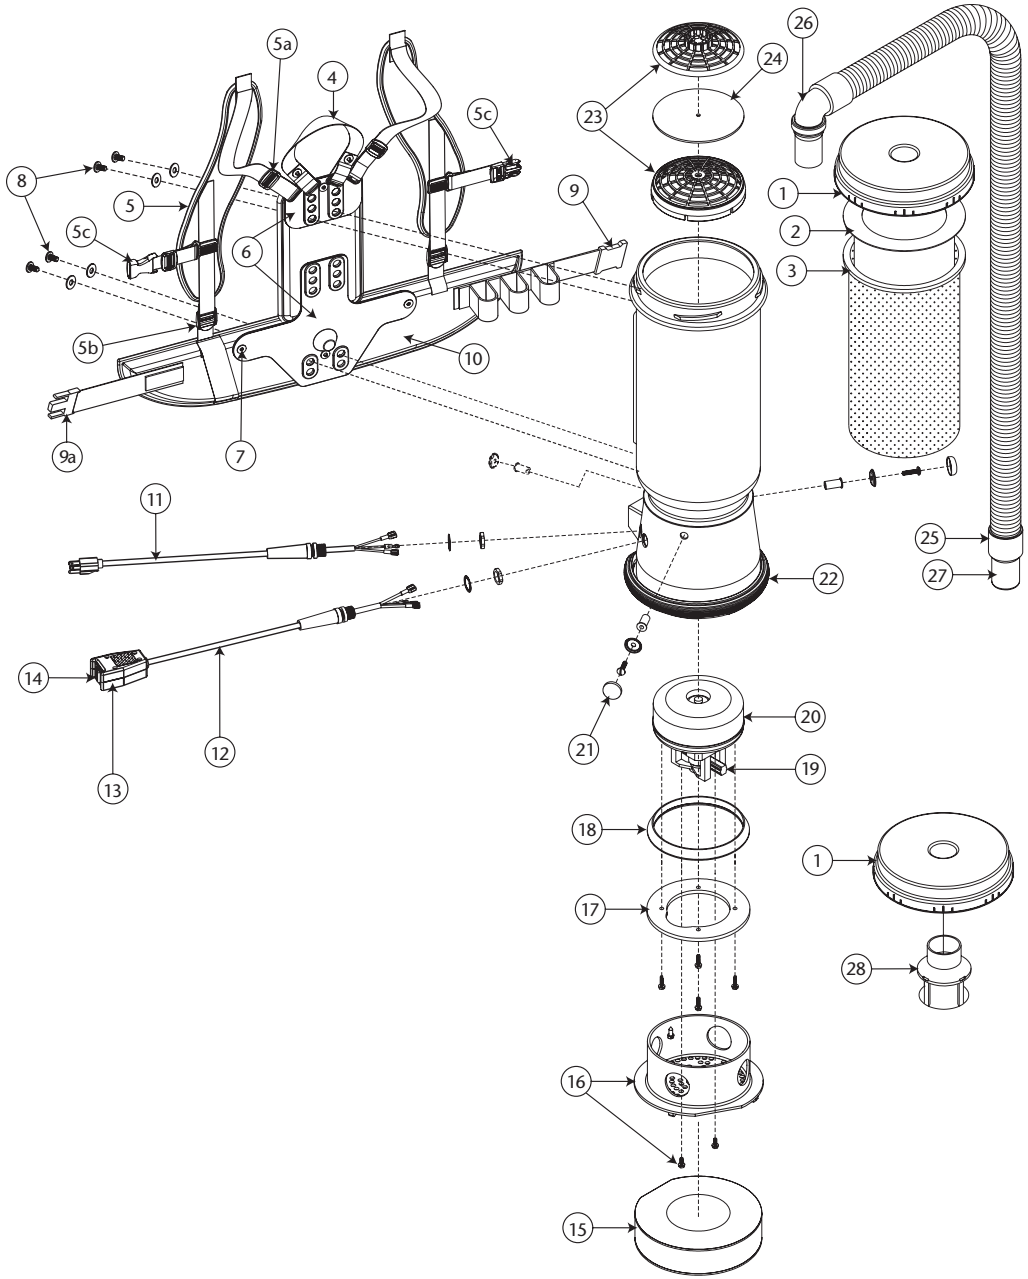

	PART #	SUPER COACHVAC & COACHVAC	QTY
1	100197	Twist Cap (Purple)	1 each
2	100331	698 Sq. In. Intercept Micro Filter	10 pack
3	100565	Micro Cloth Filter	1 each
4	101737	Carry Handle w/Rivet and Washer Set	1 set
5	100356	Shoulder Strap Assembly (includes: #5a, 5b, 5c)	1 set
5a	100358	Shoulder Strap Plastic Adjustment Buckle (Top)	1 each
5b	100357	Shoulder Strap Plastic Adjustment Buckle (Bottom)	1 each
5c	103627	Sternum Strap Buckles (Latch & Keeper)	1 set
6	105046	Backplate (includes: #7)	1 each
7	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
8	100716	Backplate (Black) Connection Set: 4 Screws with Washers	1 set
9	103963	Waist Belt Keeper	1 each
9a	100364	Waist Belt Latch	1 each
10	100359	Waist Belt (includes: #9, 9a)	1 each
	100354	Strap Assembly Complete (includes: #5, 5a, 5b, 5c, 9, 9a, 10)	1 set
	103166	Backplate (Black) System Complete (includes: #4, 5, 5a, 5b, 5c, 6, 7, 8, 9, 9a, 10)	1 set
11	100641	Power Cord (18" 16/3) Assembly	1 set
12	101610	Switch Cord Assembly (includes: #12, 13, 14)	1 each
	101717	220V Switch Cord Assembly (includes: #12, 13, 14)	1 each
13	101472	Switch Box with Velcro and Screws	1 set
	101714	Switch Cord with Crimps	1 each
14	100743	On/Off Switch	1 each
15	100597	Sound Muffler	1 each
16	105044	Motor Shroud Cover with Screw Set: 2 Screws	1 set
17	100335	Motor Compression Ring with Screws	1 set
	100378	Compression Ring Screws: 4 Screws	1 set
18	100014	Tetraseal	1 each
19	105697	Carbon Brush Set for CoachVac Motor (Domel Motor)	1 set
	100424	Carbon Brush Set for CoachVac Motor (Ametek Motor)	1 set
	105164	Carbon Brush Set for Super CoachVac Motor (Domel Motor)	1 set
	101720	Carbon Brush Set for Super CoachVac Motor (Ametek Motor)	1 set
20	105720	Motor/Fan (120 V) w/Crimps for CoachVac (Domel Motor)	1 each
	100420	Motor/Fan (220 V) w/Crimps for CoachVac (Ametek Motor)	1 each
	105162	Motor/Fan (120V) w/Crimps for Super CoachVac (Domel Motor)	1 each
	100324	Motor/Fan (220 V) with Crimps for Super CoachVac (Domel Motor)	1 each
	100379	Motor Ground and Wire Clamp Set with Screws	1 set
	100380	Motor Crimp Set: 5 Female, 3 Male, Ground Crimp Connector	1 set
21	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
22	100586	Bottom Bumper	1 each
23	100030	Dome Filter with Foam Media	1 each
24	100343	Foam Filter Media for Dome Filter	1 each
	101220	High Filtration Disk (optional)	2 pack
25	103048	Static-Dissipating Hose with Cuffs (Black)	1 each
26	101928	Replacement Double Swivel Elbow Cuff (Black)	1 each
27	100694	Replacement Swivel Cuff (Black) 1½"	1 each
28	101543	Filter Guard (Optional)	1 each
	101678	50' Extension Cord (Not Shown)	1 each

MegaVac Assembly

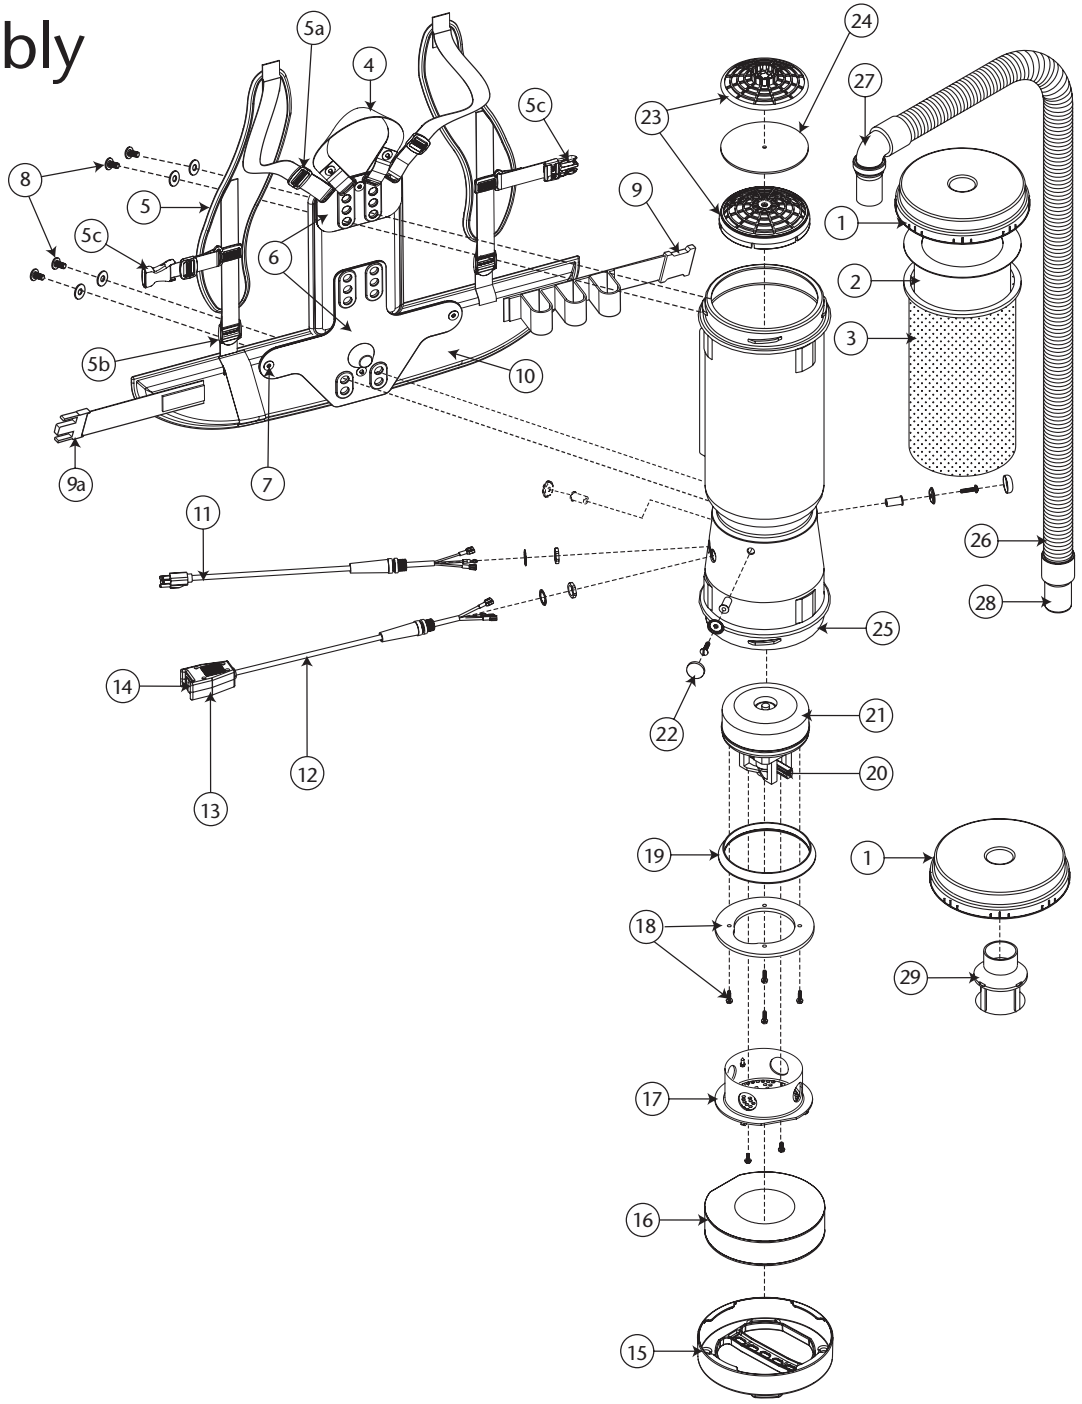

	PART #	MEGAVAC	QTY
1	100320	Twist Cap (Black)	1 each
2	100331	698 Sq. In. Intercept Micro Filter	10/pack
3	100565	Micro Cloth Filter	1 each
4	101737	Carry Handle w/Rivet and Washer Set	1 set
5	100356	Shoulder Strap Assembly (includes: #5a,5b, 5c)	1 set
5a	100358	Shoulder Strap Plastic Adjustment Buckle (Top)	1 each
5b	100357	Shoulder Strap Plastic Adjustment Buckle (Bottom)	1 each
5c	103627	Sternum Strap Buckles (Latch & Keeper)	1 set
6	105046	Backplate (includes: #7)	1 each
7	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
8	100374	Backplate Connection Set: 4 Screws w/Washers, Stand Offs	1 set
9	103963	Waist Belt Keeper	1 each
9a	100364	Waist Belt Latch	1 each
10	100359	Waist Belt (includes #9,9a)	1 each
	100354	Strap Assembly Complete (includes: #5,5a,5b,5c,9,9a,10)	1 set
	103166	Backplate System Complete (includes: #4,5,5a,5b,5c, 6,7,8,9,9a,10)	1 set
11	100641	Power Cord (18" 16/3) Assembly	1 set
12	101610	Switch Cord Assembly (includes: #12,13,14)	1 set
	101717	220V Switch Cord Assembly (includes: #12,13,14)	1 each
	101714	Switch Cord w/Crimps	1 each
13	101472	Switch Box w/Velcro and Screws	1 set
14	100743	On/Off Switch	1 each
15	105070	Bottom Twist Cap (Black)	1 each
16	100597	Sound Muffler	1 each
17	105044	Motor Shroud Cover w/Screws	1 set
18	100335	Motor Compression Ring w/Screws	1 set
	100378	Compression Ring Screw Set: 4 Screws	1 set
19	100014	Tetraseal	1 each
20	105164	Carbon Brush Set for MegaVac Motor (Domel Motor)	1 set
	101720	Carbon Brush Set for MegaVac Motor (Ametek Motor)	1 set
21	105162	Motor/Fan (120V) w/Crimps for MegaVac (Domel Motor)	1 each
	100324	Motor/Fan (220 V) w/Crimps for MegaVac	1 each
	100379	Motor Ground and Wire Clamp Set w/Screws	1 set
	100380	Motor Crimp Set: 5 Female, 3 Male, Ground Crimp Connector	1 set
22	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
23	100030	Dome Filter w/Foam Media	1 each
24	100343	Foam Filter Media for Dome Filter	1 each
	101220	High Filtration Disk (optional)	2/pack
25	104998	Bottom Twist Cap Gasket	1 each
26	103048	Static-Dissipating Hose w/Cuffs (Black)	1 each
27	101928	Replacement Double Swivel Elbow Cuff (Black)	1 each
28	100694	Replacement Swivel Cuff (Black) 1½"	1 each
29	101543	Filter Guard (Optional)	1 each
	101678	50' Extension Cord (Not Shown)	1 each

To convert the MegaVac into a blower, take out all four filters (Intercept Micro Filter, Cloth filter, Dome Filter and Exhaust Filter). Switch the lower twist cap with the upper twist cap (with the hose still attached). Turn on vacuum and use hose and upper half of wand to clean sidewalks and entryways.

LineVacer Assembly

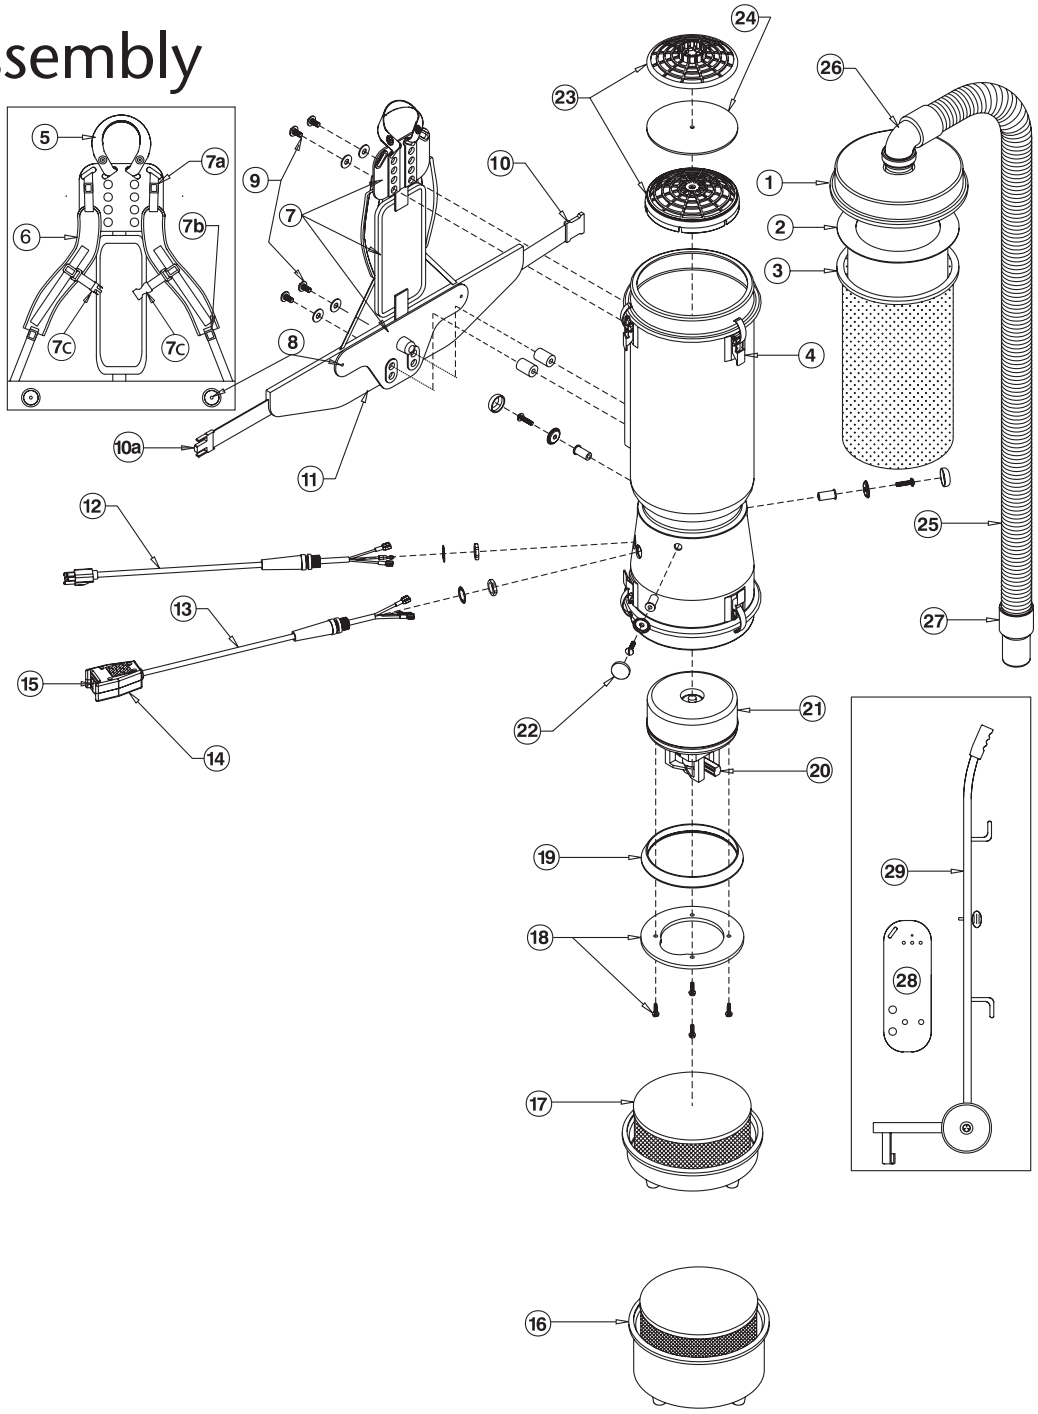

	PART #	LINEVACER	QTY
1	104276	Latch Cap w/Cuff (Black)	1 each
2	100291	698 Sq. In. Intercept Micro Filter	10/pack
3	100565	Micro Cloth Filter	1 each
4	100286	Top or Bottom Cap Latch Set: 3 Latches, 3 Locks w/6 Fastening Rivets, 6 Washers	1 set
5	101737	Carry Handle w/Rivet and Washer Set	1 set
6	100356	Shoulder Strap Assembly (includes: #7a,7b, 7c)	1 set
7	105046	Backplate (includes: #8)	1 each
7a	100358	Shoulder Strap Plastic Adjustment (Top)	1 each
7b	100357	Shoulder Strap Plastic Adjustment (Bottom)	1 each
7c	103627	Sternum Strap Buckles (Latch & Keeper)	1 set
8	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
9	100374	Backplate Connection Set: 4 Screws w/Washers, Stand Offs	1 set
10	103963	Waist Belt Keeper	1 each
10a	100364	Waist Belt Latch	1 each
11	100359	Waist Belt (includes: #10,10a)	1 each
	100354	Strap Assembly Complete (includes: #6,7a,7b,7c,10,10a,11)	1 set
	103166	Backplate System Complete (includes: #5,6,7,7a,7b,7c, 8,9,10,10a,11)	1 set
12	100641	Power Cord (18" 16/3) Assembly Complete	1 set
	100299	15' Cart power Supply Cord Complete w/Crimps (100279, 100282)	1 set
13	101610	Switch Cord Assembly 120V (includes: #13,14,15)	1 set
	101717	220V Switch Cord Assembly (includes: #13,14,15)	1 each
	101714	Switch Cord w/Crimps	1 each
	101716	26" Switch Cord Assembly Complete 120V	1 set
14	101472	Switch Box w/Velcro and Screws	1 set
	101718	Switch Box w/Belt Clip (for cart) (100279, 100282)	1 set
15	100743	On/Off Switch	1 each
16	104275	ULPA Filter Assembly Complete w/Bottom Cap (100280, 100282)	1 set
17	104274	HEPA Filter Assembly Complete w/Bottom Cap (100277, 100279)	1 set
18	100335	Motor Compression Ring w/Screws	1 set
	100378	Compression Ring Screw Set: 4 Screws	1 set
19	100014	Tetraseal	1 each
20	105697	Carbon Brush Set for LineVacer Motor (Domel Motor)	1 set
	100424	Carbon Brush Set for LineVacer Motor (Ametek Motor)	1 set
21	105720	Motor/Fan (120 V) w/Crimps (Domel)	1 each
	100420	Motor/Fan (220 V) w/Crimps (Ametek)	1 each
	100380	Motor Crimp Set: 5 female, 3 Male and a Ground Crimp Connector	1 set
	100379	Motor Ground, Wire Clamp Set w/Screws	1 set
22	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
23	100030	Dome Filter w/Foam Media	1 each
24	100343	Foam Filter Media for Dome Filter	1 each
25	103048	Static-Dissipating Hose w/Cuffs (Black)	1 each
26	101928	Replacement Double Swivel Elbow Cuff (Black)	1 each
27	100694	Replacement Swivel Cuff (Black) 1½"	1 each
28	100718	Cart Plate for Cart Assembly	1 each
29	100287	LineVacer Cart Assembly Complete	1 set
	101678	50' Extension Cord (Not Shown)	1 each

Super QuarterVac Assembly

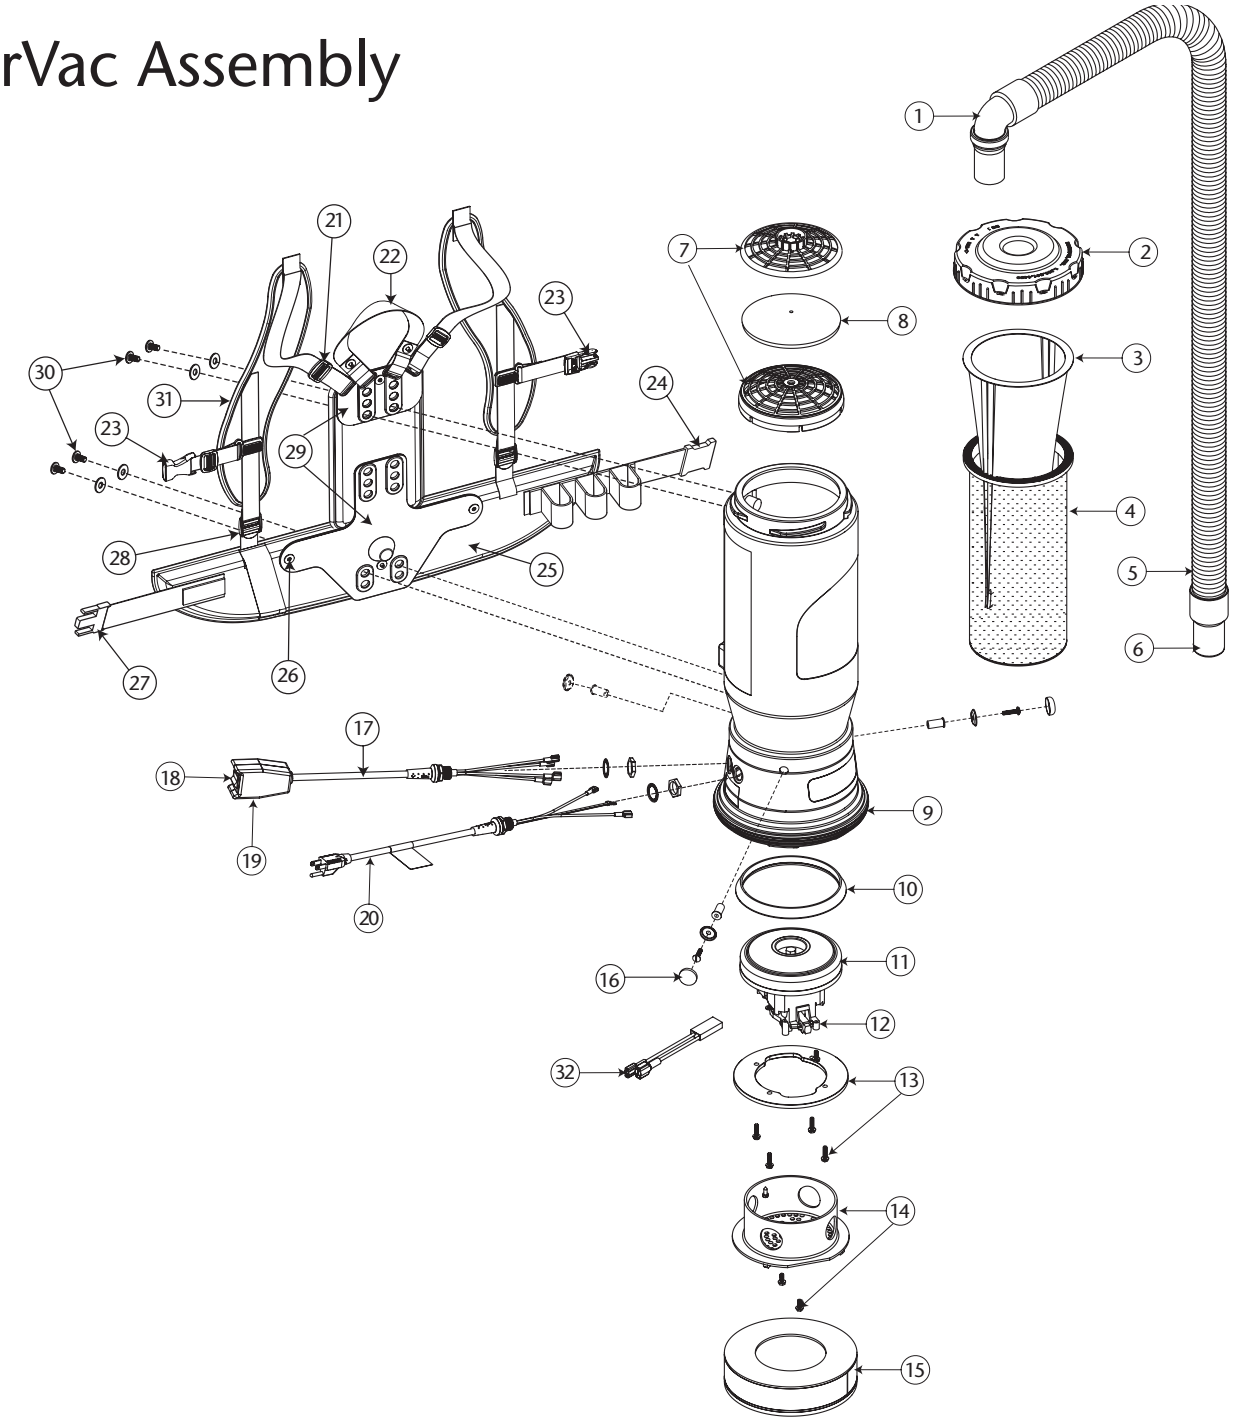

	PART #	SUPER QUARTERVAC	QTY
1	101928	Replacement Double Swivel Elbow Cuff (Black) 1½"	1 each
2	106073	Twist Cap (Purple)	1 each
3	100431	496 Sq. In. Intercept Micro Filter	10/pack
4	100564	Micro Cloth Filter	1 each
5	103048	Static-Dissipating Hose (Black) w/Cuffs 1½"	1 each
6	100694	Replacement Swivel Cuff (Black) 1½"	1 each
7	100030	Dome Filter w/Foam Media	1 each
8	100343	Foam Filter Media for Dome Filter	1 each
	101220	High Filtration Disk (optional)	2/pack
9	100586	Bottom Bumper	1 set
10	100014	Tetraseal	1 each
11	105162	Motor/Fan (120 V) w/Crimps (Domel)	1 each
	100379	Motor Ground Wire Clamp Set w/Screws	1 set
	100380	Motor Crimp Set: 5 Female, 3 Male, Ground Crimp Connector	1 set
12	105164	Carbon Brush Set (Domel Motor)	1 set
13	106204	Motor Compression Ring w/Screws	1 set
	100378	Compression Ring Screws: 4 Screws	1 set
14	105044	Motor Shroud Cover w/Screws: 2 Screws	1 set
15	105800	Sound Muffler	1 each
16	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
17	101714	Switch Cord w/Crimps	1 set
	101610	Switch Cord Assembly (includes: #18,19,20)	1 each
18	100743	On/Off Switch	1 each
19	101472	Switch Box w/Velcro and Screws	1 set
20	100641	Power Cord (18" 16/3) Assembly	1 set
21	100358	Shoulder Strap Plastic Adjustment Buckle (Top)	1 each
22	101737	Carry Handle w/Rivet and Washer Set	1 set
23	103627	Sternum Strap Buckles (Latch and Keeper)	1 set
24	103963	Waist Belt Keeper	1 each
25	100359	Waist Belt (includes: #24,27)	1 each
26	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
27	100364	Waist Belt Latch	1 each
28	100357	Shoulder Strap Plastic Adjustment Buckle (Bottom)	1 each
29	105046	Backplate Assembly (includes: #26)	1 each
	100354	Strap Assembly Complete (includes: #21,23,24,25,27,28,31)	1 set
	103166	Backplate System Complete (includes: #21,22,23,24,25, 26,27,28,29,30,31)	1 set
30	100716	Backplate (Black) Connection Set: 4 Screws w/Washers	1 set
31	100356	Shoulder Strap Assembly (includes: #21, 23, 28)	1 set
32	103476	Thermal Protector	1 each
	101678	50' Extension Cord (Not Shown)	1 each

QuarterVac Assembly

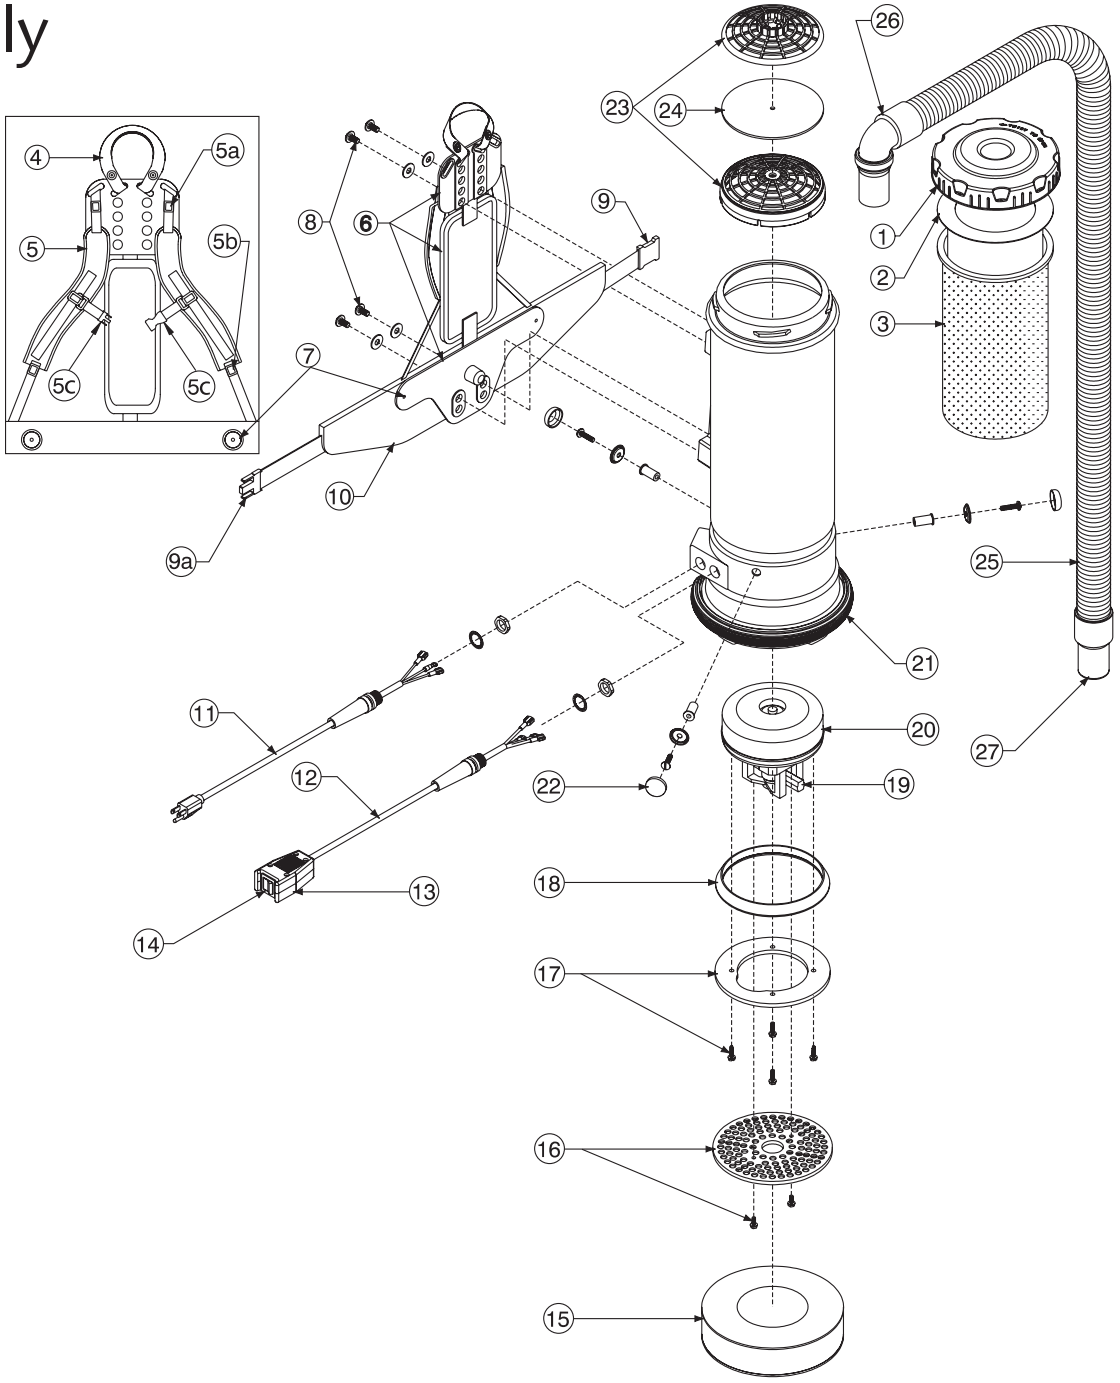

	PART #	QUARTERVAC	QTY
1	104273	Twist Cap (Black)	1 each
2	100431	496 Sq. In. Intercept Micro Filter	10 pack
3	100564	Micro Cloth Filter	1 each
4	101737	Carry Handle w/Rivet and Washer Set	1 set
5	100356	Shoulder Strap Assembly (includes: #5a, 5b, 5c)	1 set
5a	100358	Shoulder Strap Plastic Adjustment Buckle (Top)	1 each
5b	100357	Shoulder Strap Plastic Adjustment Buckle (Bottom)	1 each
5c	103627	Sternum Strap Buckles (Latch & Keeper)	1 set
6	105046	Backplate (includes: #7)	1 each
7	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
8	100716	Backplate (Black) Connection Set: 4 Screws with Washers	1 set
9	103963	Waist Belt Keeper	1 each
9a	100364	Waist Belt Latch	1 each
10	100359	Waist Belt (includes: #9, 9a)	1 each
	100354	Strap Assembly Complete (includes: #5, 5a, 5b, 5c, 9, 9a, 10)	1 set
	103166	Backplate (Black) System Complete (includes: #4, 5, 5a, 5b, 5c, 6, 7, 8, 9, 9a, 10)	1 set
11	100641	Power Cord (18" 16/3) Assembly	1 set
12	101714	Switch Cord with Crimps	1 set
	101610	Switch Cord Assembly (includes: #12, 13, 14)	1 each
	101717	220V Switch Cord Assembly (includes: #12, 13, 14)	1 each
13	101472	Switch Box with Velcro and Screws	1 set
14	100743	On/Off Switch	1 each
15	100698	Sound Muffler	1 each
16	100352	Plastic Air Diffuser with Screw Set: 2 Screws	1 set
17	100335	Motor Compression Ring with Screws	1 set
	100378	Compression Ring Screws: 4 Screws	1 set
18	100014	Tetraseal	1 each
19	105697	Carbon Brush Set for QuarterVac Motor (Domel Motor)	1 set
	101531	Carbon Brush Set for QuarterVac Motor (Ametek Motor)	1 set
	103137	Carbon Brush Set for QuarterVac Motor (220V)	1 set
20	105721	Motor/Fan (120 V) with Crimps (Domel)	1 each
	100420	Motor/Fan (220 V) with Crimps	1 each
	100379	Motor Ground Wire Clamp Set with Screws	1 set
	100380	Motor Crimp Set: 5 Female, 3 Male, Ground Crimp Connector	1 set
21	100586	Bottom Bumper	1 set
22	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
23	100030	Dome Filter with Foam Media	1 each
24	100343	Foam Filter Media for Dome Filter	1 each
	101220	High Filtration Disk (optional)	1 pack
25	103048	Static-Dissipating Hose (Black) with Cuffs 1½"	1 each
26	101928	Replacement Double Swivel Elbow Cuff (Black) 1½"	1 each
27	100694	Replacement Swivel Cuff (Black) 1½"	1 each
	101678	50' Extension Cord (Not Shown)	1 each

QuietPro BP Assembly

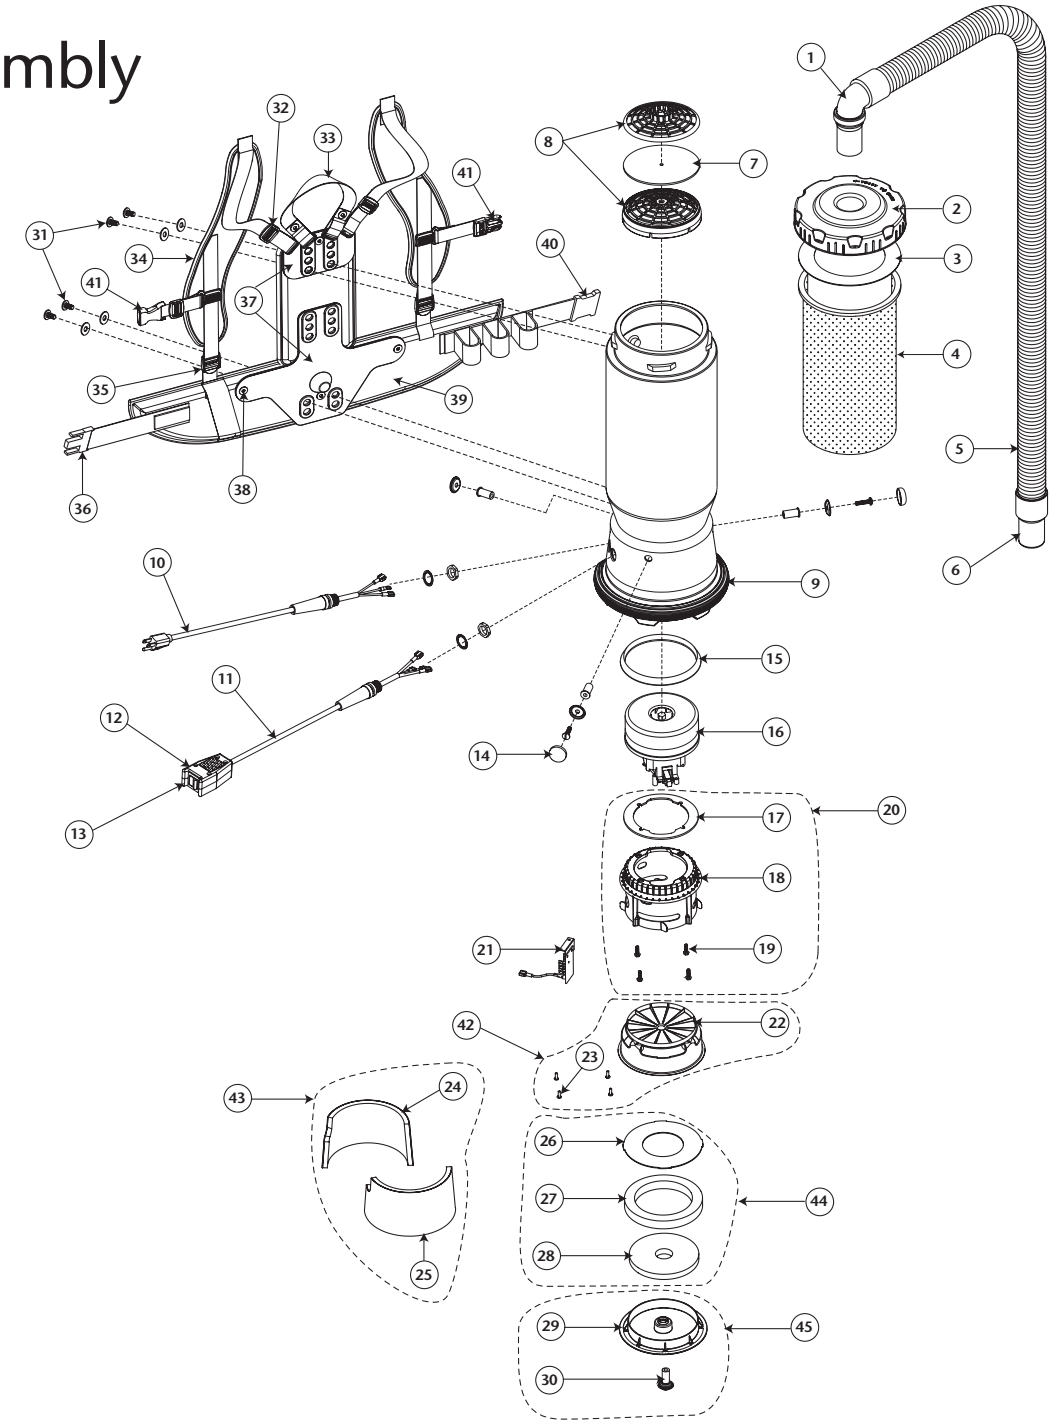

	PART #	QUIETPRO BP	QTY
1	101928	Elbow Cuff, Swivel	1 each
2	104273	Twist Cap (Black)	1 each
3	100431	496 Sq. In. Intercept Micro Filter	10/pack
4	100564	Micro Cloth Filter	1 each
5	103048	Static-Dissipating Hose (Black) w/Cuffs 1½"	1 each
6	100694	Replacement Swivel Cuff (Black) 1½"	1 each
7	100343	Foam Filter Media for Dome Filter	1 each
	101220	High Filtration Disk (Optional)	2/pack
8	100030	Dome Filter w/Foam Media	1 each
9	100586	Bottom Bumper	1 each
10	100641	Power Cord Assembly Complete w/Strain Relief	1 set
11	105748	Switch Cord Assembly Complete for QuietPro BP	1 set
12	101472	Switch Box w/Velcro and Screws	1 set
13	105438	On/Off Switch	1 each
14	100368	Motor Mounting System Set: 3 Well Nuts, 3 Bolts, 3 Washers, 3 Covers	1 set
15	105643	Tetraseal, Motor	1 each
16	105722	Motor, (120V), 2-Stage (includes #17)	1 each
	105697	Carbon Brush Set for QuietPro Motor	1 set
17	105605	Gasket, Motor	1 each
18	105149	Cap, Motor	1 each
19	105763	Screw, 10-32 x .75, Self Tapping	4/pack
20	105619	Motor Mount Assembly (includes: #17,18,19)	1 set
21	105653	Dual Speed Module and Schematic	1 each
22	105150	Exhaust Housing, Motor	1 each
23	105767	Screw, #8 x ½", Phillips, Hi/Lo	4/pack
24	105422	Acoustical Insert, Left	1 each
25	105419	Acoustical Insert, Right	1 each
26	105337	Ring, Motor Housing, Large	1 each
27	105342	Foam, Ring, Motor Housing	1 each
28	105343	Foam, Cover, Motor Housing	1 each
29	105341	Cover, Motor Housing	1 each
30	105613	Motor Mount	1 each
31	100716	Backplate (Blk) Connection Set: 4 Screws w/Washers	1 set
32	100358	Shoulder Strap Plastic Adjustment (Top)	1 each
33	101737	Carry Handle w/Rivet and Washer Set	1 set
34	100356	Shoulder Strap Assembly: (includes: #32, 35)	1 set
35	100357	Shoulder Strap Plastic Adjustment (Bottom)	1 each
36	100364	Waist Belt Latch	1 each
37	105046	Backplate Assembly (Includes #38)	1 set
	103166	Backplate System Complete (includes: #31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41)	1 set
	100354	Strap Assembly Complete (includes: #32, 34, 35, 36, 39, 40, 41)	1 set
38	100375	Barrel Nut Connection Set for Backplate (Replacement)	1 set
39	100359	Waist Belt (includes: #36, 40)	1 each
40	103963	Waist Belt Keeper	1 set
41	103627	Sternum Strap Buckles (Latch and Keeper)	1 set
42	105620	Housing, Exhaust, Motor F/QuietPro (includes: #22,23)	1 set
43	105621	Kit, Foam, Laminate Acoustical Panels (includes: #24, 25)	1 set
44	105622	Kit, Exhaust, Foam and Ring (includes: #26, 27, 28)	1 set
45	105623	Kit, Cover, Exhaust F/QuietPro (includes: #29, 30)	1 set
	101678	50' Extension Cord (Not Shown)	1 each

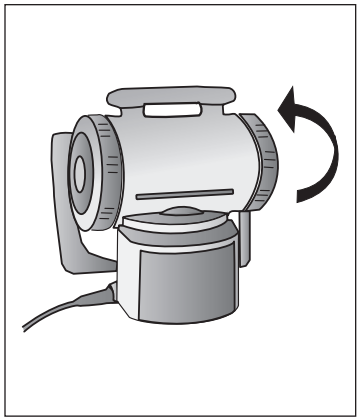

Figure A

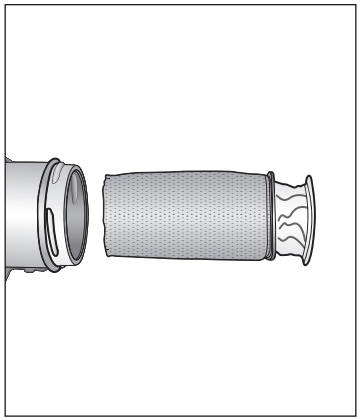

Figure B

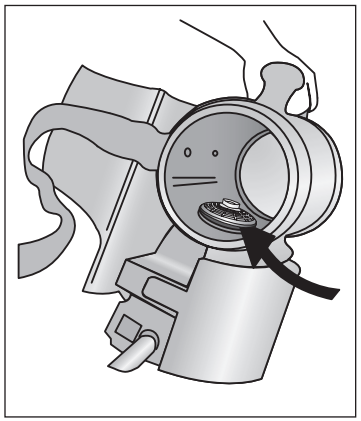

Figure C

Figure D

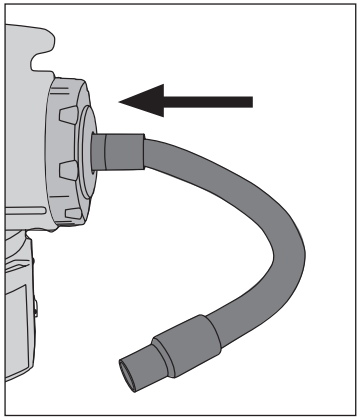

Figure E

Hip Style Vacuums

OVERVIEW

- Vacuum Unit (1)
- Powercord (2)
- Hose (3)
- Accessories (4)
- Intercept Micro Filter (5)
- Micro Cloth Filter (6)
- Dome Filter (7)



(1)

(2)



(3)

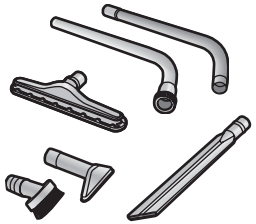

(4)

(5)



(6)



(7)

QUICK START

1. Unscrew the cap on the side of the vacuum unit (Figure A).
2. Remove filters (Figure B).
3. Check to make sure the Dome Filter did not shift during shipping (Figure C).
4. Replace the Intercept Micro Filter and the Micro Cloth Filter into the vacuum (Figure B).
5. Replace the cap (Figure D).
6. Push the hose into the cap opening (Figure E).

WEARING THE HIP-STYLE VACUUM

5. Choose one of the following ways to wear the TailVac:

   (1) Wrap the waist belt up in the envelope-style packet, and carry the TailVac by the molded top handle.

   (2) Connect the monostrap and sling it over the shoulder.

   (3) Wear the TailVac around the waist with or without the monostrap for support.

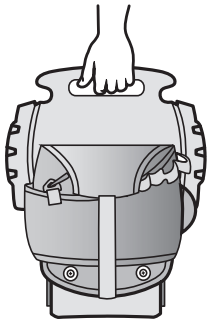

(1) Carry by the handle

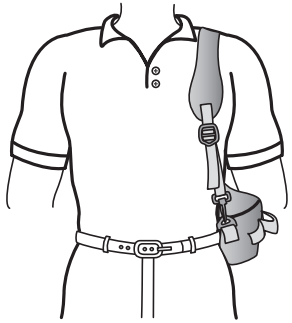

(2) Sling over the shoulder

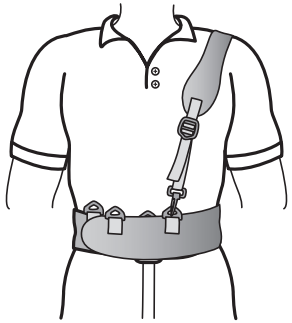

(3) Wear around the waist

6. Detach the Velcro strap (a) from the base of the waistbelt and lift the strap (Figure F).

7. Slide the Velcro strap (a) under the molded plastic handle of the vacuum and back over the top of the handle. Attach the end of the strap to the Velcro tab (b) (Figure G).

8. With the waistbelt facing you, use your right hand to separate the exposed Velcro between the end of flap (c) and the back of the belt (Figure H).

9. Continue to slide your right hand all the way to the left to separate the remaining Velcro (Figure I). With your left hand, pull the flap (c) out from behind the waistbelt and toward you to expose flap (d).

   NOTE: If Monostrap is not attached, attach it now. Attach the hook on the short end of the Monostrap to the ring up on the end of the Velcro strap (a). Attach the hook on the other end of the monostrap to any of the four rings on (d) the waistbelt. Attach to rings on flap (d) if right-handed, or flap (c) if left-handed.

10. Slide the Monostrap (e) up over your preferred shoulder. Fasten the belt by bringing the right flap (d) across the front. Then bring the left flap (c) over on top of it. (Figure J).

11. Adjust the comfort of the shoulder strap (e) by adjusting the length of the strap and/or attaching the front snap hook to any of the other rings on the front of the waistbelt (f) (Figure K). **NOTE:** For maximum comfort, alternate the shoulder strap to the right or left shoulder every two hours.

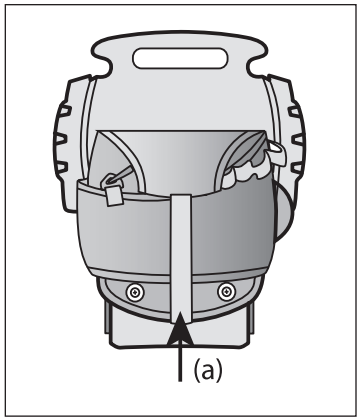

Figure F

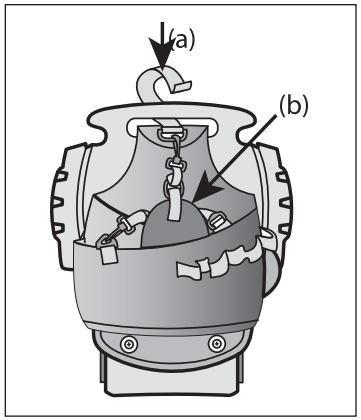

Figure G

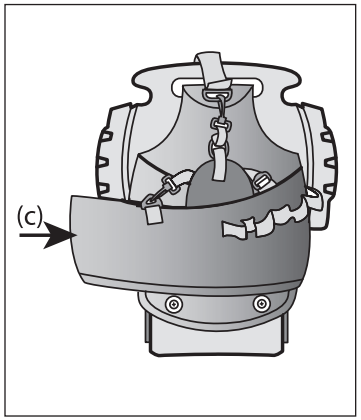

Figure H

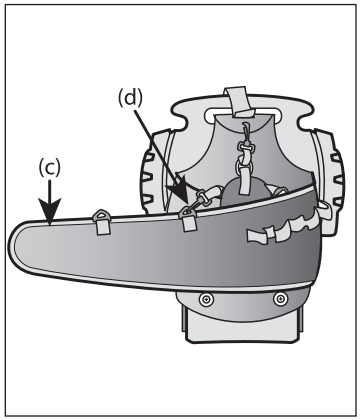

Figure I

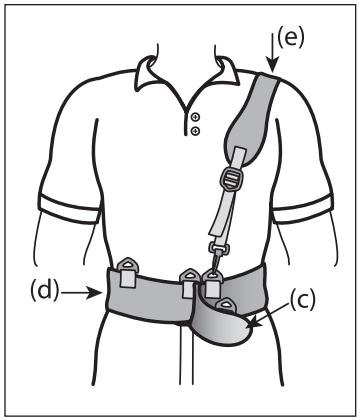

Figure J

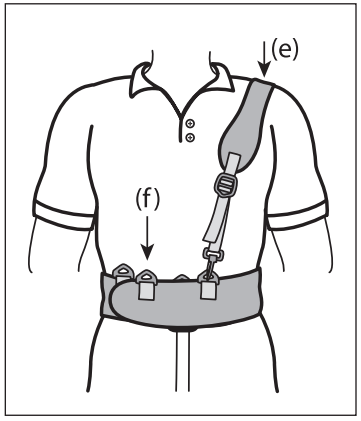

Figure K

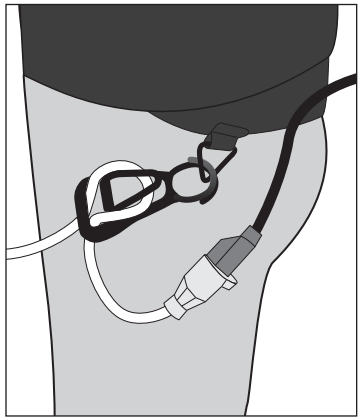

Figure L

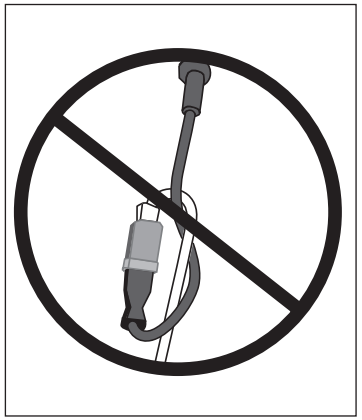

Figure M

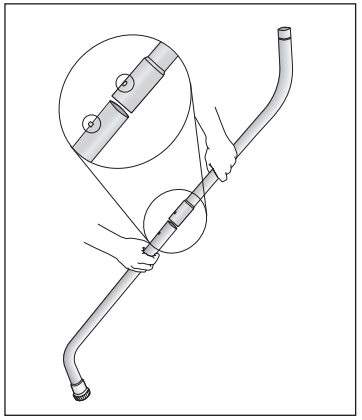

Figure N

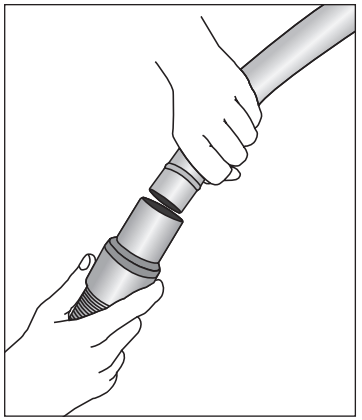

Figure O

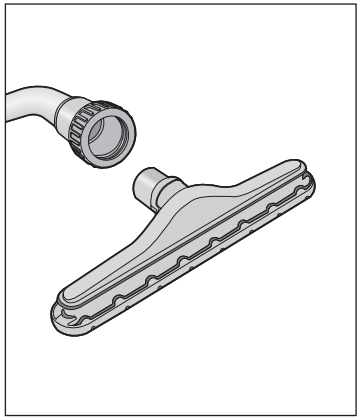

Figure P

Figure Q

OPERATING THE HIP STYLE VACUUM

15. Thread the extension cord through the Cord-O-Holder on the waistbelt (Figure L).
16. Do not tie extension cord and power cord together. Doing so will result in damage to both cords and will not be covered under warranty (Figure M).
17. Fasten the ends of the wands together, snapping them into place (Figure N).
18. Twist the wand onto the end of the hose (Figure O).
19. Attach the floor tool to end of wand. Align the brass ring with the indentation on the floor tool to ensure a secure fit (Figure P).
20. Turn the unit on, and proceed with vacuuming. The on/off switch is conveniently located on the side of the vacuum body.

PROPER VACUUMING MOTION FOR LARGE AREAS

1. Begin with the wand parallel to your body.
2. Draw the top of the wand in toward your waist and twist at the waist walking backward or forward, in a side-to-side motion (Figure Q). The motion is similar to mopping and keeps the upper body and arms from tiring.

Filter Maintenance

1. Empty and inspect the filters every time you start and finish vacuuming (Figure R). Replace if necessary. A clogged and dirty filter restricts airflow and results in reduced suction and overheating.
2. To replace the Intercept Micro Filter, slide the filter into Cloth Filter and secure into vacuum (Figure S).
3. Once a month, or as necessary, hand or machine wash the cloth filter and let it line dry, do not put it in the dryer (Figure T).
4. Once a week, or as necessary, clean the Dome Filter.
   a. First, remove the Intercept Micro Filter and Cloth Filter. Reach into the vacuum body and twist the Dome Filter from the motor (Figure U).
   b. Pull the top piece of the Dome Filter off and remove the foam media (Figure V). Shake it out, rinse it and let it air dry thoroughly.
   c. Firmly snap the top piece of the Dome Filter into place (Figure U).

   NOTE: If using a high filtration disc in place of the foam media, check it every two to three weeks. When the disc becomes discolored, replace it with a new disc. The life of the high filtration disc will depend greatly on the use and care of the Intercept Micro Filter and Cloth Filter.
5. For the TailVac, every three months (or as necessary) take off the shroud assembly by removing the two screws (Figure W). Clean the foam attached to the inside of the shroud.

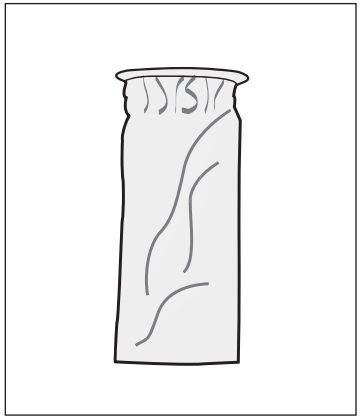

Figure R

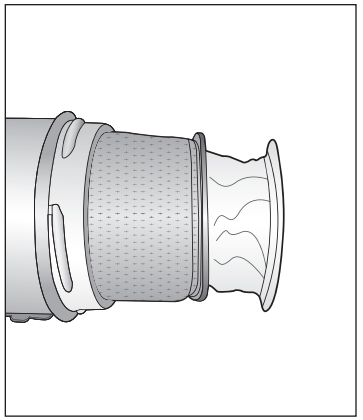

Figure S

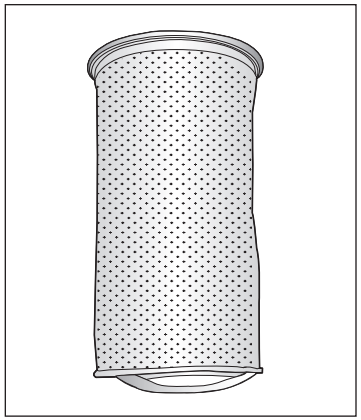

Figure T

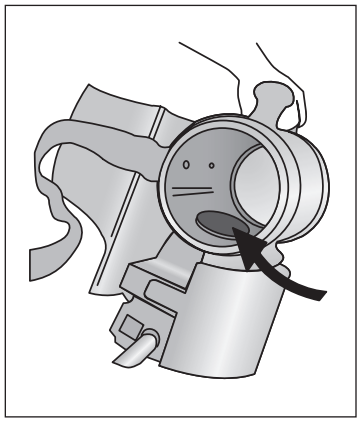

Figure U

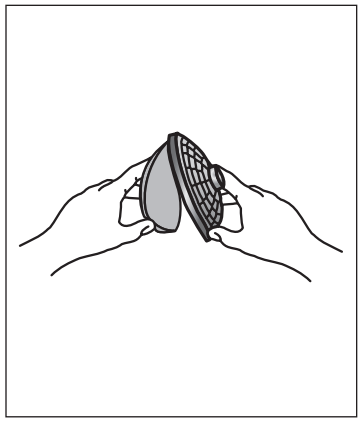

Figure V

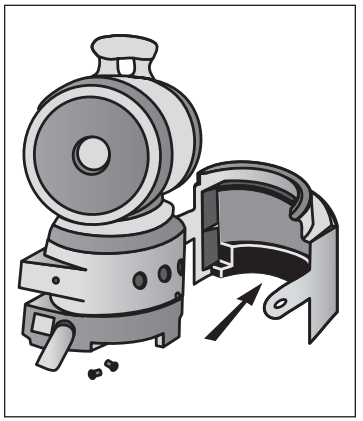

Figure W

ENGLISH

TailVac Assembly

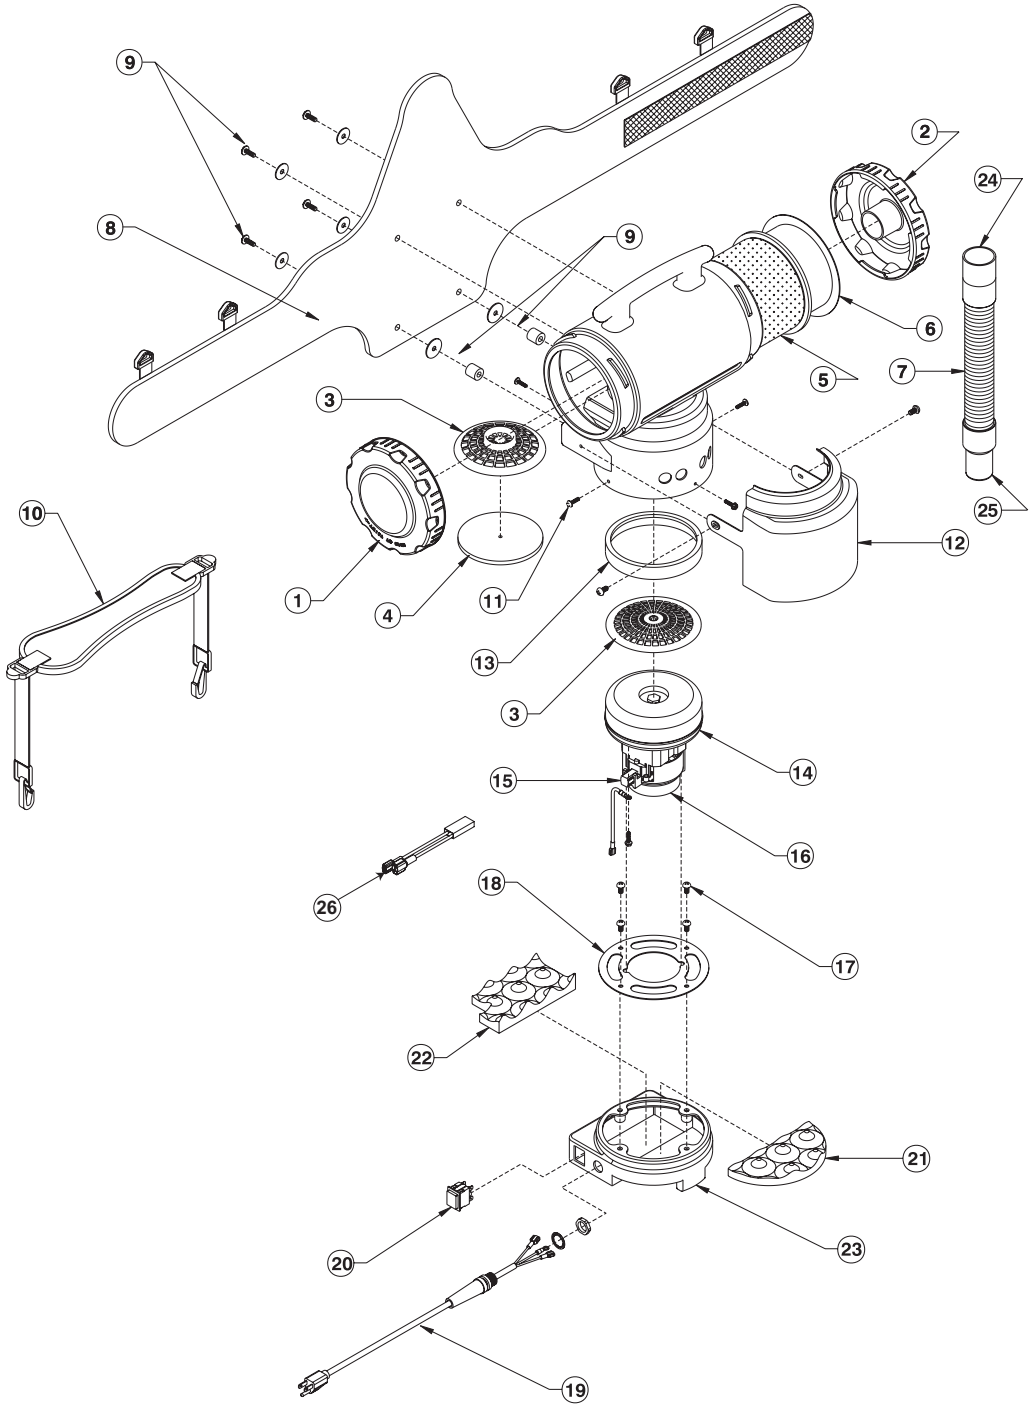

	PART #	TAILVAC	QTY
1	101288	Blind Twist Cap Assembly (Grey)	1 each
2	101934	Twist Cap for 1½" Cuff (Grey)	1 each
3	102784	Dome Filter w/Foam Media	1 each
4	101949	Foam Filter Media for Dome Filter	1 each
	102761	High Filtration Disk (optional)	2/pack
5	100564	Micro Cloth Filter	1 each
6	100431	496 Sq. In. Intercept Micro Filter	10/pack
7	101184	3-1 Stretch Hose w/Cuffs 1¼"	1 each
	101705	3-1 Stretch Hose w/Cuffs 1½"	1 each
8	102878	Waist Belt w/Velcro	1 each
9	101274	Waist Belt Connection Set: 6 Screws, Washers, 2 Stand-offs	1 set
10	102879	Monostrap	1 each
	103025	Retrofit Set: Waist Belt and Monostrap	1 set
11	101272	Step Cap Screw Kit: 4 Screws	1 set
12	101711	Shroud Retro Kit (Grey) w/2 Screws	1 each
13	103236	Motor Seal	1 each
14	101189	Motor/Fan (120V) w/Crimps (includes: #16, 18)	1 each
15	102988	Carbon Brush Set for TailVac Motor	1 set
16	103043	Fan and Brush Cover Kit	1 each
17	101271	Motor Mount Screw Kit: 6 Screws, 4 Washers	1 each
18	100950	Director Plate	1 each
19	101713	Power Cord (18" 16/3) Assembly	1 each
20	100743	On/Off Switch	1 each
21	101228	Front Sound Foam Baffle	1 each
22	101229	Rear Sound Foam Baffle	1 each
23	103262	Step Cap (Grey) (includes: #21)	1 each
24	101437	Replacement Fixed Hose Cuff (Black) 1½" x 1¼"	1 each
	101536	Replacement Fixed Hose Cuff (Black) 1½" (not shown)	1 each
25	101436	Replacement Swivel Cuff (Black) 1¼"	1 each
	100694	Replacement Swivel Cuff (Black) 1½"	1 each
26	105648	Thermal Protector	1 each
	101678	50' Extension Cord (not shown)	1 each

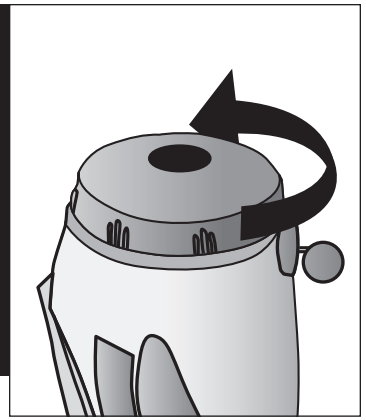

Figure A

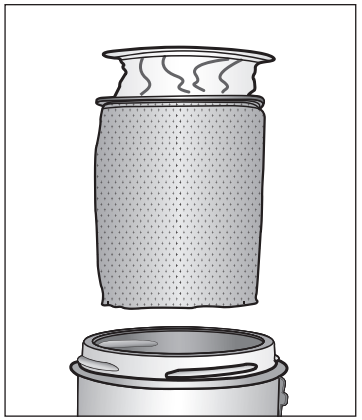

Figure B

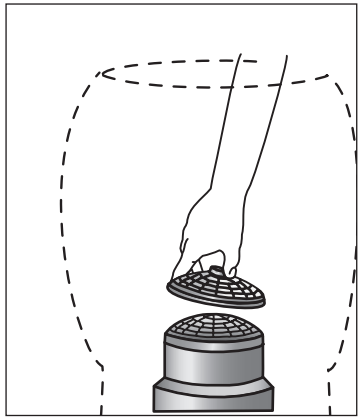

Figure C

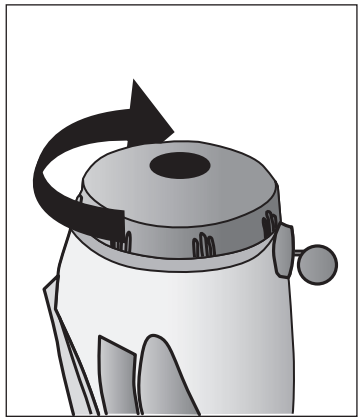

Figure D

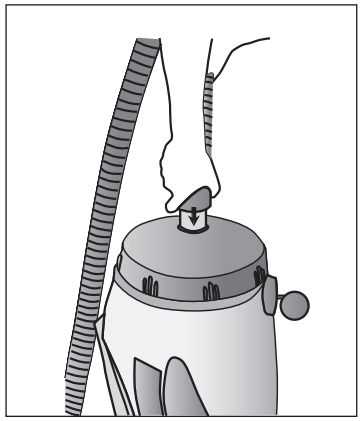

Figure E

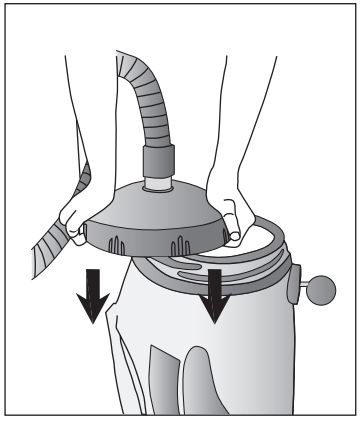

Figure F

Canister Vacuums

OVERVIEW

- Vacuum (1)
- Powercord (2)
- Hose (3)
- Accessories (4)
- Intercept Micro Filter (5)
- Micro Cloth Filter (6)
- Dome Filter (7)
- Exhaust Filter (8)

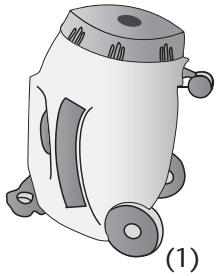

(1)



(2)

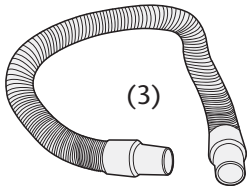

(3)

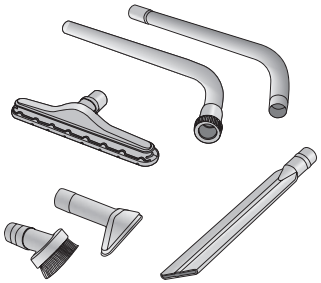

(4)

(5)



(6)



(7)

(8)

QUICK START

1. Tip the vacuum upright and remove the top cap (Figure A).
2. Remove filters (Figure B).
3. Check to make sure the filters have not shifted during shipping (Figure C).
3. Replace the filters and cap (Figure D).
4. Push the long cuff on the end of the hose completely into the cap opening (Figure E).

   NOTE: To easily remove the hose, twist off the top cap and pull off the Intercept Micro Filter. Set the cap on any flat surface so that the center of the cap rests on the top lip of the vacuum canister and push down on the cap (Figure F). The hose can then easily be pulled out of the cap.

OPERATING THE CANISTER VACUUM

5. Fasten the ends of the wands together, snapping them into place (Figure G).
6. Twist the wand onto the end of the hose (Figure H).
7. Attach the floor tool to the end of the wand. Align the brass ring with the indentation on the floor tool, this will ensure a secure fit (Figure I).
20. Turn the unit on, and proceed with vacuuming. The on/off switch is conveniently located on the top of the canister.

CANISTER ERGONOMICS

- The vacuum is lightweight and rolls smoothly.
- The weight of the vacuum is very well-balanced and easy to carry by the handle.
- Use the proper attachments for the job. ProTeam has attachments to perform most jobs without requiring you to bend over or get into difficult positions.

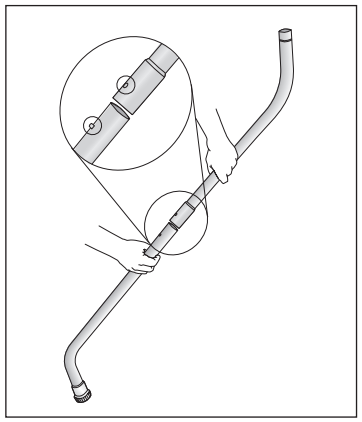

Figure G

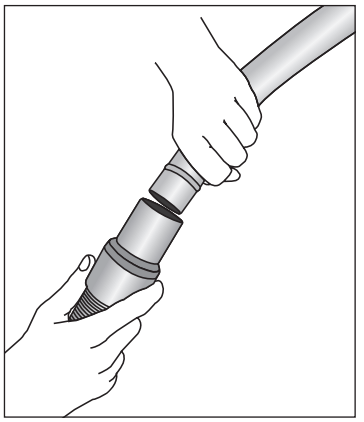

Figure H

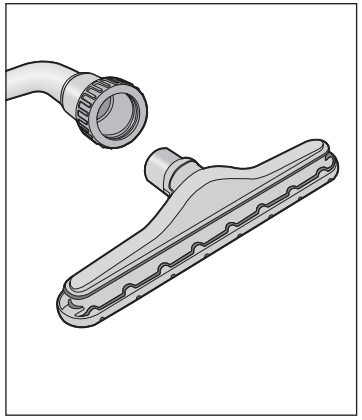

Figure I

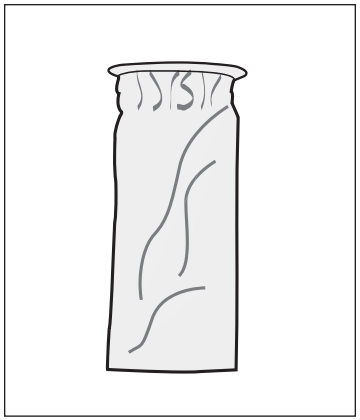

Figure J

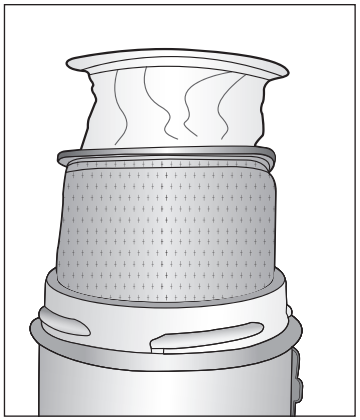

Figure K

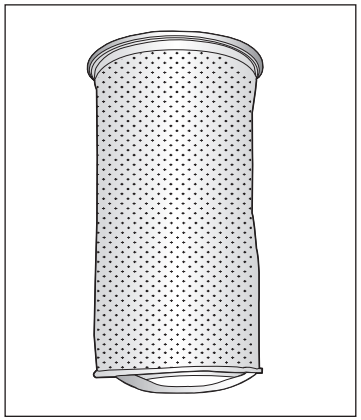

Figure L

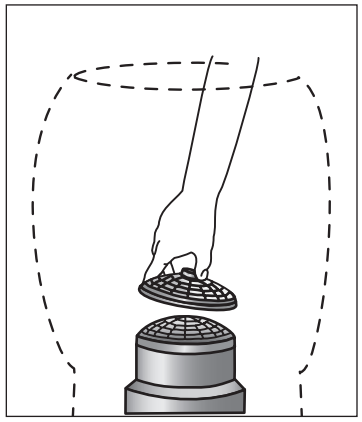

Figure M

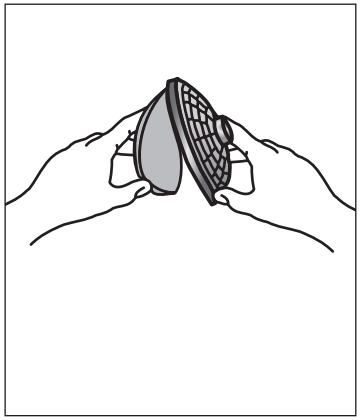

Figure N

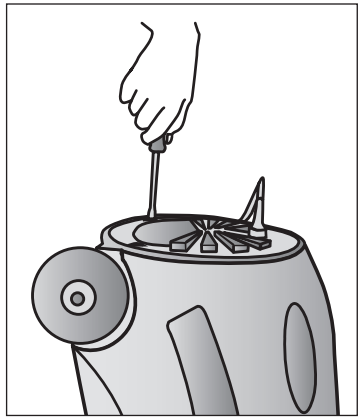

Figure O

Filter Maintenance

1. Empty and inspect the filters every time you start and finish vacuuming (Figure J). Replace if necessary. A clogged and dirty filter restricts airflow and results in reduced suction and overheating.
2. To replace the Intercept Micro Filter, slide the filter into Cloth Filter and secure into vacuum (Figure K).
3. Once a month, or as necessary, hand or machine wash the Cloth Filter and let it line dry, do not put it in the dryer (Figure L).
4. Once a week, or as necessary, clean the Dome Filter.
   a. First, remove the Intercept Micro Filter and Cloth Filter. Reach into the vacuum body and twist the Dome Filter from the motor (Figure M).
   b. Pull the top piece of the Dome Filter off and remove the foam media (Figure N). Shake it out, rinse it and let it air dry thoroughly.
   c. Firmly snap the top piece of the Dome Filter into place (Figure M).

   NOTE: If using a high filtration disc in place of the foam media, check it every two to three weeks. When the disc becomes discolored, replace it with a new disc. The life of the high filtration disc will depend greatly on the use and care of the Intercept Micro Filter and Cloth Filter.
5. Once a month (or more often if necessary) clean the exhaust diffuser. With a Phillips screwdriver, remove the four screws from the vented exhaust cover (Figure O).

6. Pull back the cover and remove the foam diffuser (Figure P). On the Rinse the diffuser, and let it air dry thoroughly (Figure Q). Before the next use, return the diffuser to its place. On the QuietPro CN, **DO NOT TRY TO WASH** or **VACUUM** the HEPA Exhaust filter. Doing so will fracture the filter media, greatly decreasing its efficiency. HEPA filters CAN be shaken out gently **EXCEPT** when hazardous materials, which must remain sealed, have been vacuumed.

7. Following the above instructions is the best way to extend the life of your canister vacuums.

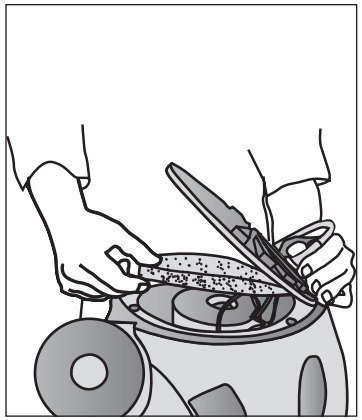

Figure P

Figure Q

ProClean Assembly

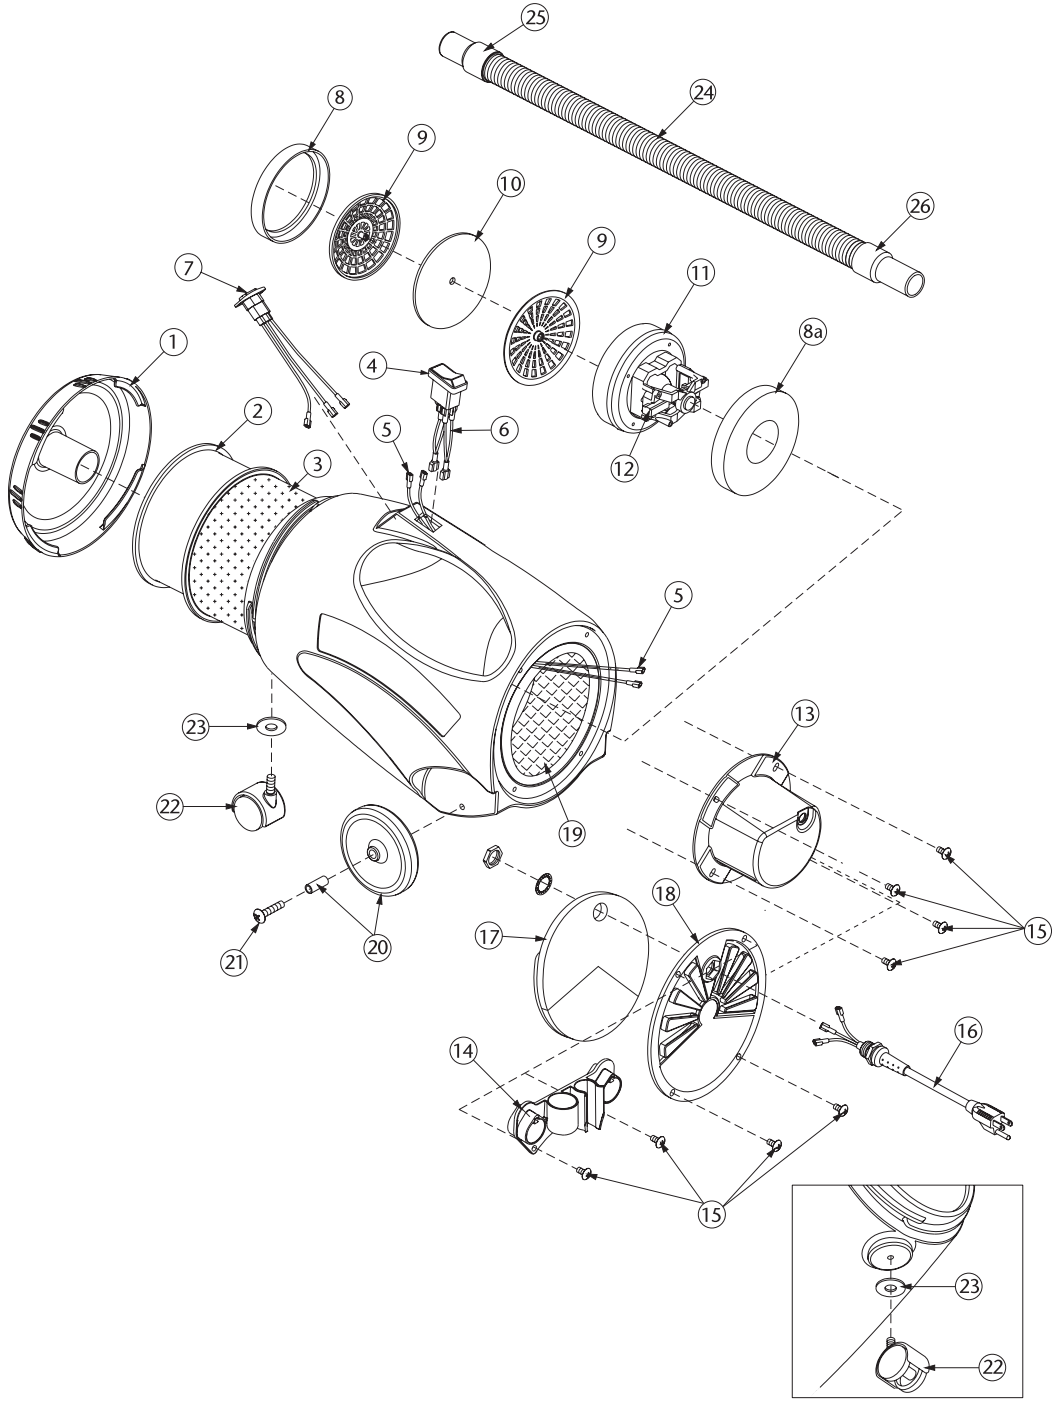

	PART #	PROCLEAN	QTY
1	103318	Top Cap, Black	1 each
2	104544	698 Sq. In. Intercept Micro Filter	10/pack
3	103115	Micro Cloth Filter	1 each
4	103669	On/Off Switch w/Splitters (includes: 2 ea. of #6)	1 each
5	103212	Wire Harness Assembly: 3 Wires and Strain Relief	1 set
6	103647	Split Jumpers	1 each
7	105047	Receptacle Assembly for Powerhead	1 each
8	103236	Motor Seal	1 each
8a	105430	Upper Foam Compression Ring	1 each
9	102784	Dome Filter w/Filter Media	1 each
10	101949	Replacement Foam Media for Dome Filter	1 each
	102761	High Filtration Disc (Optional)	2/pack
11	105687	Motor/Fan (120V) for ProClean w/Crimps (Domel Motor)	1 each
12	105164	Carbon Brush Set for ProClean Motor (Domel Motor)	1 set
	101720	Carbon Brush Set for ProClean Motor (Ametek Motor)	1 set
13	103121	Motor Mount	1 each
14	103117	Tool Dock	1 each
15	103266	Motor Mount and Vented Exhaust Cover Screw Kit	1 set
16	103215	Power Cord (18" 16/3) Assembly w/Locknut and Washer	1 each
17	103123	Exhaust Foam	1 each
18	103365	Vented Exhaust Cover, Black	1 each
19	103256	Rear Foam Diffuser	1 each
	103124	Foam Inlet Damper A (not shown)	1 each
	103125	Foam Inlet Damper B (not shown)	1 each
20	103267	Rear Wheel Assembly Kit: 2 Wheels, Spacers, 2 Screws	1 set
21	103268	Rear Wheel Mounting Screw Kit: 2 Screws	1 set
22	103114	Swivel Caster	1 each
23	103545	Conical Washer for Swivel Caster	1 set
24	103172	78" Static Dissipating Hose w/Cuffs (Black) 1½"	1 set
25	100694	Replacement Swivel Cuff (Black) 1½"	1 each
26	103150	Replacement Long Swivel Cuff (Black) 1½"	1 each
	101678	50' Extension Cord (Not Shown)	1 each

QuietPro CN HEPA Assembly

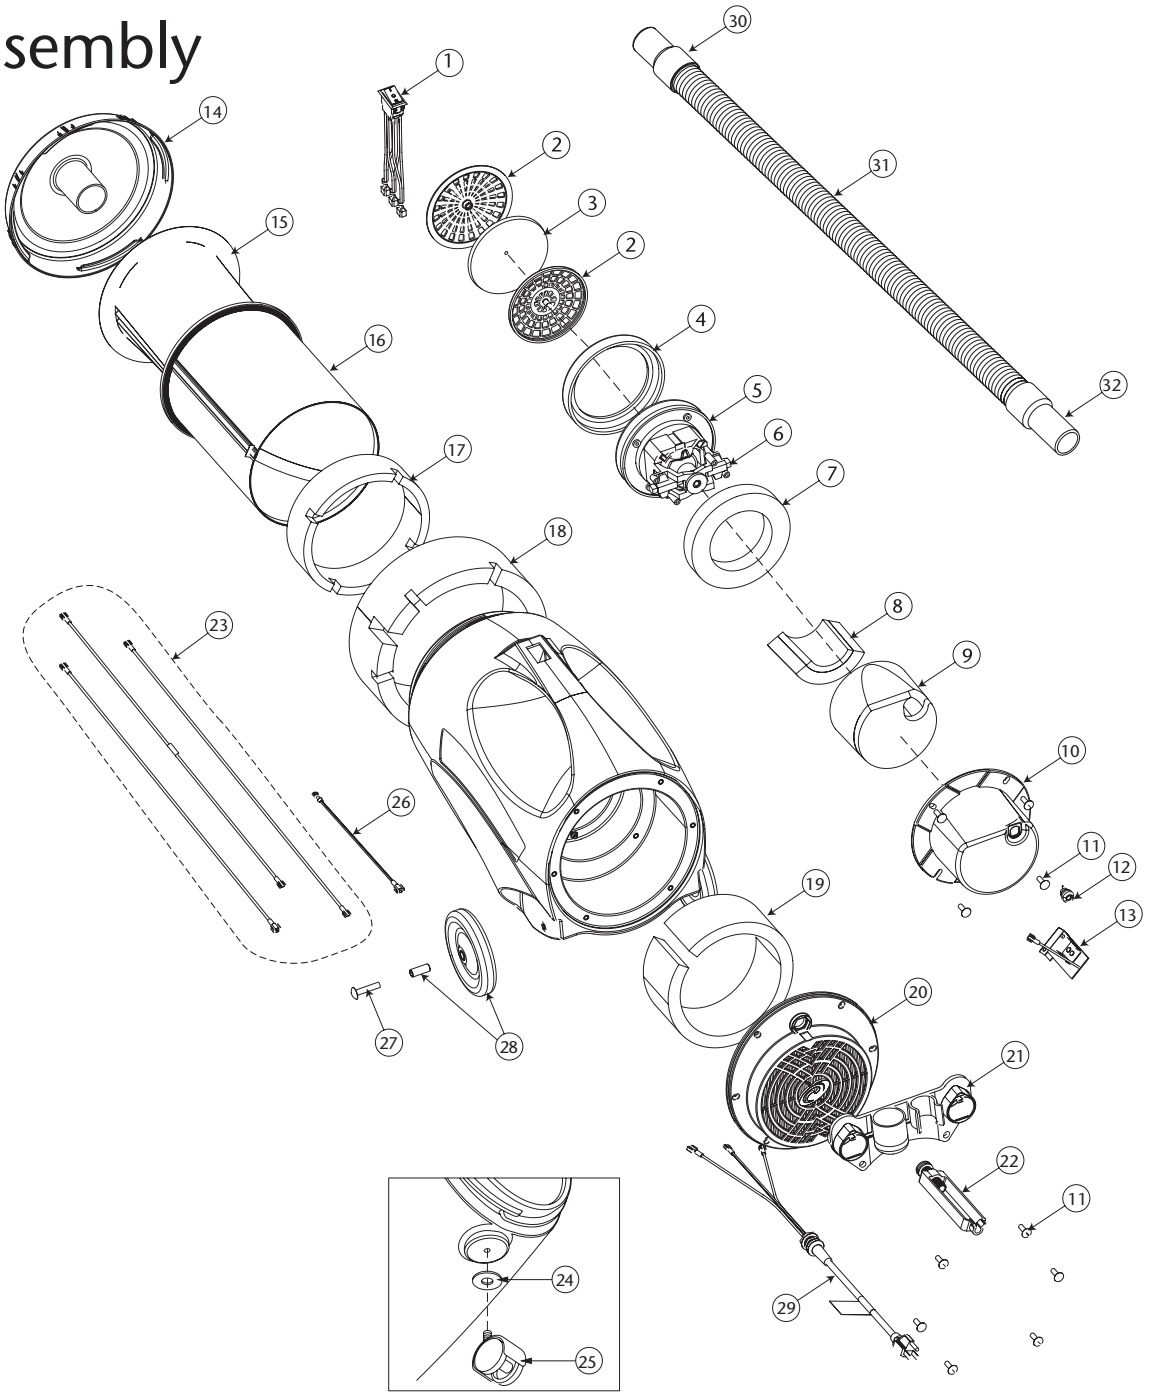

	PART #	QUIETPRO CN HEPA	QTY
1	105991	On/Off Switch (2 Stage)	1 each
2	102784	Dome Filter w/Filter Media	1 each
3	101949	Replacement Foam Media for Dome Filter	1 each
	102761	High Filtration Disk (Optional)	2/pack
4	103236	Motor Seal	1 each
5	106103	Motor/Fan (120V) for ProClean w/Crimps (Domel Motor)	1 each
6	105697	Carbon Brush Set for ProClean Motor (Domel Motor)	1 set
7	105430	Upper Foam Compression Ring	1 each
8	105949	Noise Suspension Filter Assembly	1 each
9	105948	Noise Suspension Foam	1 each
10	103121	Motor Mount	1 each
11	103266	Motor Mount and Vented Exhaust Cover Screw Kit	1 set
12	102127	Small Strain Relief	1 each
13	105653	Dual Speed Module F/Quiet Pro	1 each
14	103318	Top Cap, Black	1 each
15	104544	698 Sq. In. Intercept Micro Filter	10/pack
16	103115	Micro Cloth Filter	1 each
17	103125	Foam Inlet Damper B	1 each
18	103124	Foam Inlet Damper A	1 each
19	103256	Rear Foam Diffuser	1 each
20	103638	Replacement HEPA Filter Kit (includes: #11,20,29)	1 set
21	103117	Tool Dock	1 each
22	103441	Cord Lock	1 each
23	106203	Wire Harness Assembly: 3 Wires and Strain Relief	1 set
24	103545	Conical Washer for Swivel Caster	1 set
25	103114	Swivel Caster	1 each
26	106107	Ground Jumper	1 each
27	103268	Rear Wheel Mounting Screw Kit: 2 Screws	1 set
28	103267	Rear Wheel Assembly Kit: 2 Wheels, 2 Spacers, 2 Screws	1 set
29	103215	Power Cord (18” 16/3) Assembly w/Locknut and Washer	1 each
30	100694	Replacement Swivel Cuff (Black) 1½"	1 each
31	103172	78" Static Dissipating Hose w/Cuffs (Black) 1½"	1 set
32	103150	Replacement Long Swivel Cuff (Black) 1½"	1 each
	101678	50' Extension Cord (Not Shown)	1 each